


tasker[®]

The excellence for
Made in Italy

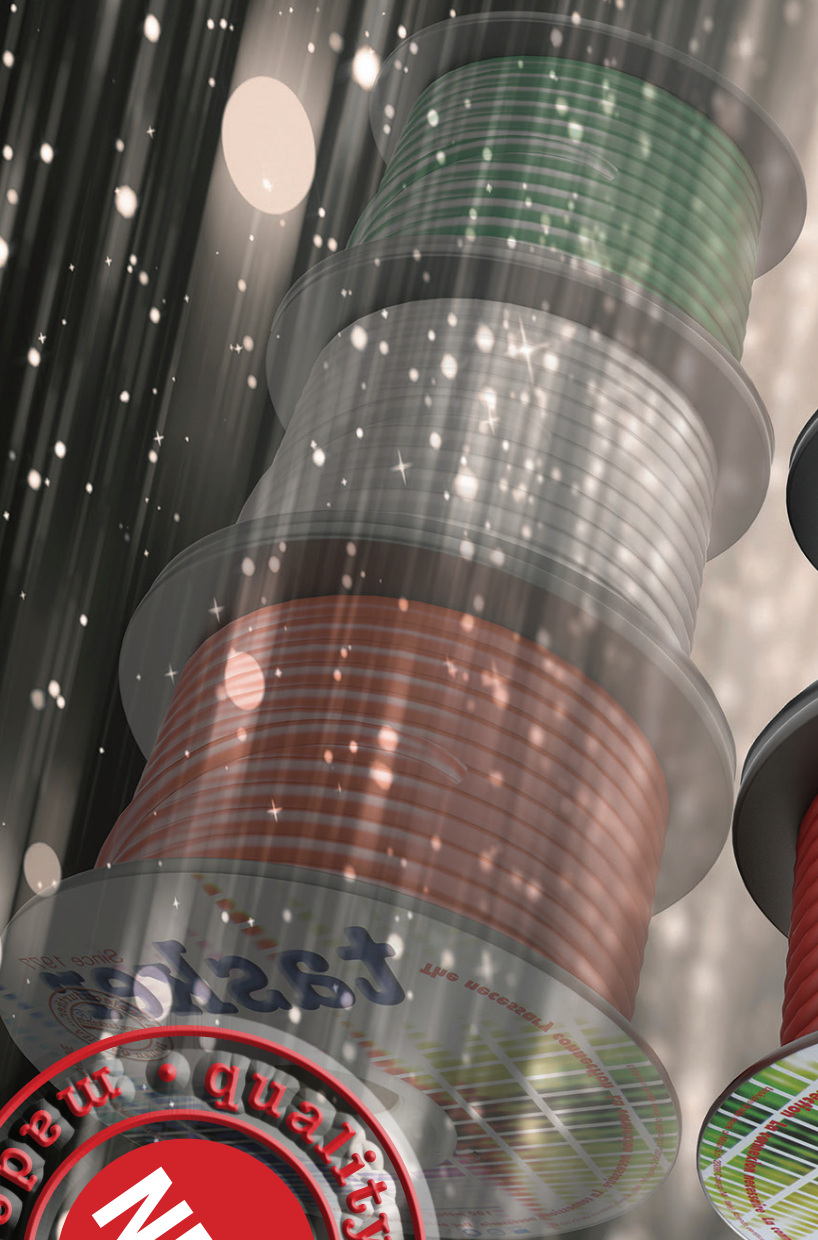

Audio

**Cavo microfonico T32,
2x0,22 mm² FLUO extra flex
in versione "pocket":**

FLUO Microphone cable T32, 2x0.22 mm² extra flex in "pocket" version:

Cable de microphone FLUO T32, 2x0.22 mm² extra flex en version "pocket":

FLUO T32 Mikrofonskabel, 2x0.22 mm² Extra Flex in der "Pocket" - Version:

Cable de microphone FLUO T32, 2x0.22 mm², extra flexible, version "Pocket":

Микрофонный кабель FLUO T32, 2x0,22 мм², очень гибкий в «карманной» версии:

**10
20 mt**



tasket[®]






tasker®

...a project further...

NEW

**CPR Cca Certified Cables -
Microphone and Digital Audio DMX Ca - Cca - Also for Outdoor**

		TSK1050 CPR Cca	TSK1038 CPR Cca
HOMOLOGATION:		Cca-s1a-a1-a1	Cca-s1a-a1-a1
APPLICATION:		Audio Fix Installation	DMX and Light Fix Installation
INNER CABLES	<i>n° Cond.</i>	2	2
NOMINAL SECTION	<i>mm²</i>	2x0,35	2x0,35
CONDUCTOR FORMATION	<i>ø mm</i>	7x0,25 CS OFC	7x0,25 CS OFC
CORE INSULATION	<i>ø mm</i>	1,80 L.S.Z.H.	2,00 Foam PE
SHIELDING	<i>type and coverage</i>	Al/foil tape 100%	CS Braid 85%
OUTER SHEATH	<i>mm</i>	6,20 L.S.Z.H. L.S.Z.H. HalogenFree FirestoP	6,20 L.S.Z.H. L.S.Z.H. HalogenFree FirestoP
PACKAGING	<i>m</i>	100/300/500	100/300/500
PAIR CAPACITY	<i>pF/m</i>	55,00	46,00
CAPACITY core/shield	<i>pF/m</i>	92,00	92,00
CONDUCTOR RESISTANCE	<i>Ω/Km</i>	56,50	56,50
MAX RATED VOLTAGE	<i>V.</i>	49	49
IMPEDANCE	<i>Ω</i>	90	110
OPERATIVE TEMPERATURE	<i>°C</i>	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - 305/2011 UE	



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando un cavo microfonico e un DMX per la classe di rischio medio **Cca s1a-d1-a1**. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his range of CPR certified cables with the homologation of one microphone and one DMX Cable for medium risk class **Cca s1a-d1-a1**. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

tasker®

...a project further...

NEW

CPR Cca Certified Cables - Loudspeakers- Also for Outdoor


		TSK 401 CPR Cca	TSK 402 CPR Cca	TSK 403 CPR Cca	TSK 404 CPR Cca
HOMOLOGATION:		Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d1 - a1
APPLICATION:		Loudspeaker Cable for Fix Installation	Loudspeaker Cable for Fix Installation	Loudspeaker Cable for Fix Installation	Loudspeaker Cable for Fix Installation
INNER CABLE	n° Cond.	2	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50	2x4,00
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU	56x0,30 OFC CU
CORE INSULATION	ø mm	4,00 L.S.Z.H	2,80 L.S.Z.H	3,40 L.S.Z.H	4,00 L.S.Z.H
INSULATION COLOUR		Black and Red	Black and Red	Black and Red	Black and Red
SHEATH	type	L.S.Z.H. FirestoP® HalogenFree	L.S.Z.H. FirestoP® HalogenFree	L.S.Z.H. FirestoP® HalogenFree	L.S.Z.H. FirestoP® HalogenFree
	ø mm	7,10	7,80	8,90	10,00
SHEATH COLOR		Black	Black	Black	Black
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98	4,95
MIN. BENDING RADIUS	Outer ø	10	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100	100	100	100
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE - 305/2011 UE			



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando tre cavi cassa per la classe di rischio medio Cca s1a-d0-a1. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of three loudspeaker cables for medium risk class Cca s1a-d0-a1. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

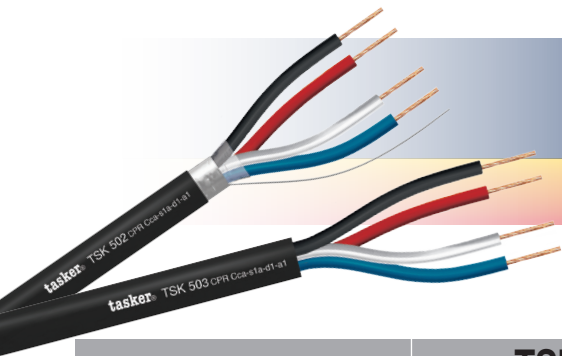


tasker®

...a project further...

NEW

CPR Cca Certified Cables - Loudspeakers- Also for Outdoor

		TSK 502 CPR Cca	TSK 503 CPR Cca
HOMOLOGATION:		Cca - S1a - d1 - a1	Cca - S1a - d1 - a1
APPLICATION:		Loudspeaker Cable for Fix Installation	Loudspeaker Cable for Fix Installation
INNER CABLE	n° Cond.	4	4
NOMINAL SECTION	mm²	4x1,50	4x2,50
CONDUCTOR FORMATION	mm	28x0,25 OFC CU	52x0,25 OFC CU
CORE INSULATION	ø mm	2,80 L.S.Z.H. + Aluminium foil tape and drain wir	3,00 L.S.Z.H. + Aluminium foil tape and drain wir
INSULATION COLOUR		Black, Red, White, Blue	Black, Red, White, Blue
SHEATH	type ø mm	L.S.Z.H. FirestoP HalogenFree 9,20	L.S.Z.H. FirestoP HalogenFree 9,50
SHEATH COLOR		Black	Black
PACKAGING	m	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	13,30	7,98
MIN. BENDING RADIUS	Outer ø	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100	100
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE - 305/2011 UE	

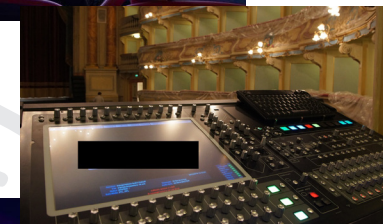

Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando tre cavi cassa per la classe di rischio medio Cca s1a-d1-a1. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of three loudspeaker cables for medium risk class Cca s1a-d1-a1. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

tasker®



...a project further...

NEW

CPR Cca Certified Cables -Digital Audio DMX Multipair Also for Outdoor



		TSK902 CPR Cca	TSK904 CPR Cca	TSK908 CPR Cca	TSK9012 CPR Cca
HOMOLOGATION:		Cca s1a-d1-a1	Cca - s1a - d1 - a1	Cca - s1a - d1 - a1	Cca - s1a - d1 - a1
APPLICATION:		Audio Fix Installation	Audio Fix Installation	Audioi Fix Installation	Audioi Fix Installation
NOMINAL OF PAIR		2	4	8	12
NOMINAL SECTION	mm²	2x2x0,25 CU	2x2x0,25 CU	2x2x0,25 CU	2x2x0,25 CU
CONDUCTOR FORMATION	ø mm	1x0,57	1x0,57	1x0,57	1x0,57
CORE INSULATION	ø mm	1,50 Foam Skin PE	1,50 Foam Skin PE	1,50 Foam Skin PE	1,50 Foam Skin PE
PAIRS SHIELDING	type and coverage	Al foil tape 100% + Drain Wire	Al foil tape 100% + Drain Wire	Al foil tape 100% + Drain Wire	Al foil tape 100% + Drain Wire
PAIR SHEATH	ø mm	3,80 Black L.S.Z.H.	3,80 black L.S.Z.H.	3,80 black L.S.Z.H.	3,80 black L.S.Z.H.
TOTAL SHIELDING	type and coverage	Al foil tape 100% + CS Covering 85%	Al foil tape 100% + CS Covering 85%	Al foil tape 100% + CS Covering 85%	Al foil tape 100% + CS Covering 85%
OUTER SHEATH	mm	10,20 Black L.S.Z.H. <u>HalogenFree</u> <u>FirestoP</u>	12,40 Black L.S.Z.H. <u>HalogenFree</u> <u>FirestoP</u>	16,00 Black L.S.Z.H. <u>HalogenFree</u> <u>FirestoP</u>	18,90 Black L.S.Z.H. <u>HalogenFree</u> <u>FirestoP</u>
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/100m	75	75	75	75
PAIR CAPACITY	pF/m	45	45	45	45
PROPAGATION VELOCITY	%	76	76	76	76
MAX RATED VOLTAGE	V.	49	49	49	49
IMPEDANCE	Ω	110	110	110	110
OPERATIVE TEMPERATURE	°C	-20/+80	-20/+80	-20/+80	-20/+80
Standards:		RoHS2 2011/65/UE - EN50575 - 305/2011 UE			



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR inserendo un serie di cavi multicoppia digitali 110 ohm per applicazioni Audio e DMX, altamente schermati e omologati per classe di rischio medio Cca s1a-d1-a1. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his range of CPR certified cables with 110 ohm digital multipair series for audio and DMX application, highly shielded and homologated for medium risk class Cca s1a-d1-a1. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

...a project further...

NEW

CPR B2ca and Cca Certified Cables -LAN and Video Also for Outdoor



		C729 CPR B2ca	C722 CPR B2ca	TSK1078 CPR Cca	TSK1079 CPR Cca
HOMOLOGATION:		B2ca - s1a - d0 - a1	B2ca - s1a - d0 - a1	Cca - s1a - d1 - a1	Cca - s1a - d1 - a1
APPLICATION:		S.F./U.T.P. Cat.6 - PH120	Fix Installation S.F./U.T.P. Cat.6 LAN	Fix Installation 12G-SDI over 60m	Fix Installation 12G-SDI over 80m
INNER CABLES	n° Cond.	8	8	1	1
NOMINAL SECTION	mm²	4x2x0,34	4x2x0,25	1x0,50	1x1,00
CONDUCTOR FORMATION	ø mm	1x0,64 CU Stiff wire OFC	1x0,57 CU Stiff wire OFC	1x0,80 CU Stiff wire OFC	1x1,13 CU Stiff wire OFC
CORE INSULATION	ø mm	1,05 PE+Mineral glass tape	1,15 Foam Skin PE	3,50 Gas Injected PEE	4,80 Gas Injected PEE
TOTAL SHIELDING	type and coverage	Metallic tape 100%+ CS Braid 55%	Al-PET - Al foil 100% + CS Braid 55%	Al-PET - Al foil 100% + CS Braid 78%	Al-PET - Al foil 100% + CS Braid 75%
OUTER SHEATH	mm	10,60 Red L.S.Z.H. HalogenFree FirestoP Fire Resistant 2h@850°C	7,50 Black L.S.Z.H. L.S.Z.H. HalogenFree FirestoP	5,00 Black L.S.Z.H. L.S.Z.H. HalogenFree FirestoP	6,80 Black L.S.Z.H. L.S.Z.H. HalogenFree FirestoP
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500
CAPACITY	pF/m	58,00	46,00	52,00	52,00
CONDUCTOR RESISTANCE	Ω/Km	59,40	74,00	36,00	18,00
VELOCITY OF PROPAGATION	%	66,00	75,00	85,00	85,00
MIN. BENDING RADIUS	x O.D.	10	10	10	10
IMPEDANCE	Ω	100	100	75	75
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50575 - 305/2011 UE			



Connectors



NE8MX6-B
max. ø 9,5mm.
(for C722 CPR B2ca)



N8NC75BLP9X
max. ø 6,3 mm.
(for TSK 1078 Cca)



NBNC75BTU11X
max. ø 7,3 mm.
(for TSK 1079 Cca)

Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR inserendo tre nuovi prodotti omologati per le classi di medio (Cca) ed elevato rischio incendio (B2ca). Si tratta di un cavo LAN S.F./U.T.P. di Cat.6 e di due cavi Coassiale HD SDI per le più moderne applicazioni a 12Gb/s, tutti con guaina in L.S.Z.H. speciale. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his range of CPR certified cables by introducing three new products approved for the medium (Cca) and high (B2ca) fire risk classes. We are talking about a LAN cable S.F./U.T.P. Cat.6 and two HD-SDI Coaxial cable for the latests 12Gb/s applications all with special L.S.Z.H. sheath. These cables are made with the most modern raw materials and construction techniques in order to guarantee the highest safety standards on the market without compromising on flexibility.

tasker®

...a project further...

NEW

CPR Cca Certified Cables - EVAC PH120 - Also for Outdoor



		TSK 201	TSK 202	TSK 203
OMOLOGATION:		Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d0 - a1
APPLICATION:		Voice Evacuation and Speakers	Voice Evacuation and Speakers	Voice Evacuation and Speakers
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU
CORE INSULATION	ø mm	2,50 Silicon Rubber	2,80 Silicon Rubber	3,40 Silicon Rubber
INSULATION COLOUR		1 Cond. Black and 1 Red	1 Cond. Black and 1 Red	1 Cond. Black and 1 Red
SHEATH	type ø mm	LSZH FirestoP HalogenFree 7,10	LSZH FirestoP HalogenFree 7,80	LSZH FirestoP HalogenFree 8,90
SHEATH COLOR		Violet	Violet	Violet
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98
CAPACITY	pF/m	60	60	60
MAX PULL STRENGTH	N Kg	100 10	150 15	250 25
IMPEDANCE	Ω	110	110	110
MIN. BENDING RADIUS	Outer ø	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100/100	100/100	100/100
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE - EN50200 (PH120) - CEI 20-105 V1 - 305/2011 UE		



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando anche i cavi EVAC e rilevamento incendio per la classe di rischio medio. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of EVAC and Fire Detection cable for medium risk class. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

tasker®

...a project further...

NEW

CPR Cca Certified Cables - Fire Detection PH120 - Also for Outdoor



		TSK 301	TSK 302	TSK 303
OMOLOGATION:		Cca - S1a - d1 - a1	Cca - S1a - d1 - a1	Cca - S1a - d1 - a1
APPLICATION:		Fire Detection and Signal Trasmission	Fire Detection and Signal Trasmission	Fire Detection and Signal Trasmission
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU
INSULATION	ø mm	2,50 Silicon Rubber	2,80 Silicon Rubber	3,40 Silicon Rubber
INSULATION COLOUR		1 Cond. Black and 1 Red	1 Cond. Black and 1 Red	1 Cond. Black and 1 Red
SHIELDING	type and coverage	metallic Foil Tape 100% + tinned copper Drain Wire	metallic Foil Tape 100% + tinned copper Drain Wire	metallic Foil Tape 100% + tinned copper Drain Wire
SHEATH	type ø mm	LSZH, FirestoP, HalogenFree 7,10	LSZH, FirestoP, HalogenFree 7,80	LSZH, FirestoP, HalogenFree 8,90
SHEATH COLOR		Red	Red	Red
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98
MAX PULL STRENGTH	N Kg	100 10	150 15	250 25
MIN. BENDING RADIUS	Outer ø	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100	100	100
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE - EN50200 (PH120) - CEI 20-105 V1 - 305/2011 UE		



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando anche i cavi EVAC e rilevamento incendio per la classe di rischio medio. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of EVAC and Fire Detection cable for medium risk class. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.


tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Costruction - Eca Class

		C128 CPR	RG59 CPR	TSK108 CPR	C1100 CPR	C8035 CPR
HOMOLOGATION:		Eca and UKCA	Eca	Eca	Eca	Eca
APPLICATION:		Long Distance Audio	Standard Video	Speakers	Electronics	Data Transmission
INNER CABLES	n° Cond.	2	1	2	1	8
NOMINAL SECTION	mm²	2x0,35	1x0,26	2x8,00	1x1,00	8x0,35
CONDUCTOR FORMATION	ø mm	11x0,20 CU+CS OFC	1x0,58 CW	112x0,30 CU OFC	32x0,20 CU OFC	11x0,20 CU OFC
CORE INSULATION	ø mm	1,70 Compact PE	3,70 Compact PE	5,70 PE	2,50 PVC Flame Retardant	1,60 PVC Flame Retardant
SHIELDING	type and coverage	CS Braid 85%	CU Braid 95%		CU Braid 85%	CU Braid 85%
OUTER SHEATH	mm	6,10 FirestoP Special Flame Retardant PVC	6,20 FirestoP Special Flame Retardant PVC	14,40 FirestoP Special Flame Retardant Tubular PVC	4,40 FirestoP Special Flame Retardant PVC	7,80 FirestoP Special Flame Retardant PVC
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500	100/300/500
PAIR CAPACITY	pF/m	55,00				110
CAPACITY	core/shield	92,00	67,00		280,00	200
CONDUCTOR RESISTANCE	Ω/Km	58,00	154,00	2,39	18,80	58
MAX RATED VOLTAGE	V.	49	2000	49	49	49
IMPEDANCE	Ω		75			
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70	-20/+70	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50575 - 305/2011 UE				



Products description

Prima gamma di prodotti **Tasker** omologati CPR per la classe di rischio bassa Eca. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

First range of CPR homologated **Tasker** cables for low risk class Eca. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

...a project further...

NEW

Battery Jumper Cables - 2x16 - 2x25 - 2x35 mm²

** Production on demand available also Red/Blue



APPLICATION:		** C221	** C222	** C223
		Power Charge	Power Charge	Power Charge
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm ²	2x16,00	2x25,00	2x35,00
CONDUCTOR FORMATION	mm	448x0,20 Multiwire in red copper	696x0,20 Multiwire in red copper	976x0,20 Multiwire in red copper
INSULATION	ø mm	7,00 Special PVC	8,60 Special PVC	9,70 Special PVC
SHEATH	type	Transparent second sheath in Special PVC	Transparent second sheath in Special PVC	Transparent second sheath in Special PVC
	ø mm	8,90x19,00	10,80x22,80	12,30x26,00
PACKAGING	m hank	50	50	50
MARKING	m ²	16 CE	25 CE	35 CE
CONDUCTOR RESISTANCE	Ω/Km	1,21	0,78	0,55
MIN. BENDING RADIUS		114 mm Fix Installation 57 mm Mobile Installation	137 mm Fix Installation 69 mm Mobile Installation	156 mm Fix Installation 78 mm Mobile Installation
MAX RATED VOLTAGE	U ₀ /U V.	450 Vac 750 Vdc	450 Vac 750 Vdc	450 Vac 750 Vdc
TEST VOLTAGE	V	2500 V/15'	2500 V/15'	2500 V/15'
OPERATIVE TEMPERATURE	°C	-40/+85 Fix Installation -25/+85 Mobile Installation	-40/+85 Fix Installation -25/+85 Mobile Installation	-40/+85 Fix Installation -25/+85 Mobile Installation
Standards:		RoHS2 2015/863/UE		



Products description

Tasker ha ampliato la sua ricca gamma di piattine divisibili inserendo una nuova linea di prodotti ideale per realizzare i cavi di ricarica delle batterie per gli autoveicoli. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his already wide range of flat divisible cables by inserting some new ones, perfect to realize auto vehicles power charge cables. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

trade mark of MILAN S.r.l. a socio unico
Viale Europa, 74 20090 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158 Fax. +39 02 9039.4551

www.tasker.it

tasker®

...a project further...

NEW

New Sections of Speaker Cables - T Series

		T19	T28	T29	T35	T37
APPLICATION:		Mobile Use	Mobile Use	Mobile Use	Mobile Use	Mobile Use
INNER CABLES	<i>n° Cond.</i>	2	2	2	4	8
NOMINAL SECTION	mm ²	2x0,75 (2x19 AWG)	2x6,00 (2x9 AWG)	2x8,00 (2x8 AWG)	4x4,00 (4x11 AWG)	8x2,50 (8x13 AWG)
CONDUCTOR FORMATION	mm	24x0,20 OFC	84x0,30 OFC	112x0,30 OFC	82x0,25 OFC	51x0,25 OFC
INSULATION	ø mm	2,10 PVC	5,00 PVC	5,70 PVC	3,70 PVC	3,20 PVC
INSULATION COLORS		1 Black and 1 Red	1 Black and 1 Red	1 Black and 1 Red	Black, Red, Green, Blue	Black, Red, Green, Blue, Yellow, Grey, Brown, Orange
SHEATH	ø mm	6,0 PVC Flame Retardant FirestoP®	12,40 PVC Flame Retardant FirestoP®	14,40 PVC Flame Retardant FirestoP®	12,00 PVC Flame Retardant FirestoP®	12,80 PVC Flame Retardant FirestoP®
SHEATH COLOR		Black	Black	Black	Black	Black
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	21,93	2,75	2,39	4,31	6,41
MAX RATED VOLTAGE	V.	49	49	49	49	49
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70	-20/+70	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE				

Products description

Tasker ha ampliato la sua gamma di cavi cassa seguendo le principali richieste di mercato. Sono stati inseriti nuovi cavi cassa bipolari singola guaina nelle sezioni da 0,75, 6 e 8 mm che offrono un'ottima flessibilità e maneggevolezza senza trascurare la purezza del suono garantita dalla formazione in rame puro OFC. Completano la nuova serie le versioni multipolari da 4 e 8 conduttori.

Tasker has enlarged its range of cables following the main market demands. The new single sheath bipolar speaker cables with section of 0.75, 6 and 8 mm offer excellent flexibility and manageability without compromising the purity of the sound guaranteed by pure OFC copper. The new series includes multipolar versions with 4 and 8 conductors.



tasker®

...a project further...

NEW

Special Speakers and DMX Cables

		TSK1117	TSK1118	C282 Super	C862
APPLICATION:		Interference Protection	Interference Protection	Speakers Arrey	DMX Lights
INNER CABLES	<i>n° Cond.</i>	2	2	8	4
NOMINAL SECTION	mm ²	2x4,00	2x6,00	8x4,00	2x2x0,35
CONDUCTOR FORMATION	mm	128x0,20 OFC	122x0,25 OFC	128x0,20 CU OFC	19x0,16 CS OFC
INSULATION	ø mm	4,20 PE	5,00 PE	3,80 PVC HT105* Groupped around a central filler PE	1,52 FOAM PE
INSULATION COLORS		1 Black and 1 Red		Black and Numbered	Red, Green and White/Black
SHIELDING	type and coverage	Red Copper Braid 85% OFC			Alluminium foil tape 100% + CS Braid 85%
SHEATH	ø mm	11,00 PVC Flame Retardant	13,20 FirestoP	18,00 PVC	7,50 PUR OUTDOOR USE
SHEATH COLOR		Black		Black	Black
PACKAGING	m	100/300/500		100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	4,31	2,75	5,74	59,40
MAX RATED VOLTAGE	V.	49		49	49
IMPEDENCE	Ω				110
OPERATIVE TEMPERATURE	°C	-20/+70		-15/+70	-15/+80
Standards:		RoHS2 2011/65/UE and 2015/863UE			

Products description

Tasker ha ampliato la sua gamma di cavi cassa e DMX seguendo le principali richieste di mercato. Sono state aggiunte due nuove sezioni di cavi cassa schermati di sezione 4 e 6 mm che estendono la gamma dei prodotti della stessa famiglia già esistenti con sezioni da 1, 1.5 e 2.5 mm. Questi prodotti garantiscono un'ottima protezione dalla interferenza grazie a una fitta schermatura a treccia anch'essa in rame puro. Il C282 Super è la nuova versione ad alta resistenza del C282, grazie alla sua costruzione a corona è particolarmente adatto alle applicazioni mobili anche continue. Il C862 è il più avanzato cavo DMX della tasker, presenta una doppia coppia da 110 ohm, schermatura a treccia, elementi aramidici di tenuta e guaina in poliuretano per esterno. Si tratta di cavo adatto alle più svariate applicazioni operative, sia INDOOR che OUTDOOR.

Tasker has enlarged its range of speakers and DMX cables following the main market demands. Two new sections of shielded speaker cables of section 4 and 6 mm that extend the range of the existing family products with sections of 1, 1.5 and 2.5 mm. These products guarantee excellent protection against interferences thanks to a dense braid shielding made of pure copper too. The C282 Super is the new high-strength version of the C282, thanks to its crown construction is particularly suitable for mobile applications also continuous. The C862 is the most advance DMX cable of the tasker range, it features a 110 ohm double pair, braided shielding, aramidic strength elements and the outer polyurethane sheath. It is a cable suitable for the most varied operating applications, both INDOOR and OUTDOOR.



tasker®

...a project further...

NEW

Extra Flex 12G-SDI Cables for 4K Broadcast

** Production on demand

Also Available
in PUR for outdoor
heavy duty
application

		T42 PVC	** T442 PVC
APPLICATION:		12G-SDI Video 4K	Multi 12G-SDI Video 4K
INNER CABLES	n° Cond.	1	1x4
NOMINAL SECTION	mm²	1x0,88	1x0,88
CONDUCTOR FORMATION	ø mm	7x0,40 OFC	7x0,40 OFC
CORE INSULATION	ø mm	4,80 Foam PE	4,80 Foam PE
INNER SHIELD	type and coverage	Double CS Braid 89 and 86%	Double CS Braid 89 and 86%
SINGLE CORE SHEATH	ø mm		7,10 PUR FirestoP® HalogenFree
SINGLE COAX SHEATH COLOR			Black or Green
OUTER SHEATH	mm	7,10 Soft PVC	21,80 Soft PVC
OUTER SHEATH COLOR		Black or Green	Black or Green
PACKAGING	m	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	21,00	21,00
MAX RATED VOLTAGE	V.	49	49
IMPEDANCE	Ω	75	75
VELOCITY OF PROPAGATION	%	86	86
OPERATIVE TEMPERATURE	°C	-15/+70	-15/+70
MIN. BENDING RADIUS	Fix (O.D.) Mobile (O.D.)	8 10	8 10
Standards:		RoHS2 2011/65/UE and 2015/863UE	

Attenuation dB/100 m.

10 MHz	2,03
100 MHz	6,71
1000 MHz	22,5
2000 MHz	33,98
3000 MHz	44,96
4500 MHz	52,79
6000 MHz	70,01

Recommended Installation Distances

HD-SDI	120
3G-SDI	100
6G-SDI	70
12G-SDI	70

Connectors



NBNC75BWU13 (TN450)



Products description

Con il diffondersi delle tecnologie 6G e 12GSDI tasker ha deciso di ampliare la gamma dei modelli T42 inserendo una versione in soft PVC e un cavo multiplo a quattro conduttori. Il T42 è un coassiale estremamente flessibile che grazie al suo speciale dielettrico e alla doppia treccia in rame stagnato permette di lavorare, con i nuovi standard trasmissivi, a distanze di 70 metri. Inoltre, grazie al conduttore multifilare la versione PUR è adatta non solo ad installazioni su avvolgicavo professionali per broadcast ma anche alla movimentazione in catenaria con test di efficienza eseguita a 500000 cicli con velocità e accelerazione massima rispettivamente di 3,3 m/s e 4,0 m/s².

With the spread of 6G and 12GSDI technologies, tasker decided to expand the T42 model range by introducing a version in soft PVC and a four-conductor multiple cable. The T42 is an extremely flexible coax that thanks to its special dielectric and the double braid in tinned copper allows working at distances of 70 meters with the new transmission standards. Moreover, thanks to the multi-wire conductor the PUR version is suitable not only for installations on professional cable drums for broadcast but also for drag chain installation with efficiency test performed at 500000 cycles with maximum speed and acceleration respectively of 3.3 m/s and 4.0 m/s².

tasker®


...a project further...

NEW

Special Application LAN CABLES

★★ Production on demand

		** C 730		** C 726 PUR Super		C 724	
TYPE:		Cat. 6A S.F./U.T.P.		Cat. 7A S/F.T.P.		Cat. 8 S/F.T.P.	
APPLICATION:		Higt Temperature		LAN Data Over 1GHz		LAN Data Over 2GHz	
INNER CABLES	n° Cond.	8		8		8	
NOMINAL SECTION	mm²	4x2x0,14 CU		4x2x0,26 CU		4x2x0,34 CU	
CONDUCTOR FORMATION	mm	7x0,16		7x0,22		1x0,64	
CORE INSULATION	ø mm	1,00 FEP Teflon		1,53 Foam -Skin PE		1,45 Foam -Skin PE	
PAIRS SHIELDING	type and coverage			Al Foil tape 100% + Drain wire		Al Foil tape 100%	
SHIELD	type and coverage	Al Foil tape 100% CS Braid 80%		CS Braid 85%		Al Braid 85% +CS Drain Wire	
OUTER SHEATH		5,70 Green FEP Teflon HalogenFree FirestoP OUTDOOR USE		8,70 Black PUR HalogenFree FirestoP OUTDOOR USE Aramidic rip Cord		8,00 Black L.S.Z.H. HalogenFree FirestoP	
PACKAGING	m	100/300/500		100/300/500		100/300/500	
CONDUCTOR RESISTANCE	Ω/100m.	138		72		58	
IMPEDANCE	Ω	100		100		100	
MAX RATED VOLTAGE	V.	90		49		49	
OPERATIVE TEMPERATURE	°C	-90/+180		-40/+80		-30/+70	
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50200 - IEC 60332-1-2					

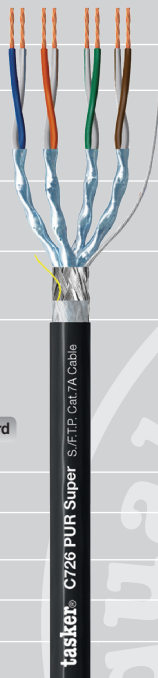

Products description

Tasker ha ampliato la sua gamma di cavi LAN di categoria 6 e 7, inserendo nuovi prodotti studiati per applicazioni speciali. Il C729 è un cavo doppio schermo con isolamento speciale in fibra di vetro che lo rende resistente al fuoco diretto fino due ore (PH120). Il tasker C730 è un cavo con anime e guaina in FEP teflon, un materiale morbido ma allo stesso tempo ritardante la fiamma, privo di alogeni e resistente agli oli, ai raggi UV, agli agenti chimici e atmosferici. Tutte queste caratteristiche lo rendono un prodotto particolarmente indicato per uso esterno anche in condizioni estreme grazie alla sua temperatura operativa di -90 a + 180°C. Il C726 PUR Super è il nostro primo cavo Cat.7A per la trasmissione dati di nuova generazione a 1000 MHz.

Tasker has enriched its range of LAN cables Cat. 6 and 7, inserting new products, projected for special applications. Tasker C729 is a cable with a double screen and special insulation in glass fiber, that makes this cable resistant to direct fire till two hours (PH120). Tasker C730 is a cable with cores and sheath in FEP Teflon, a very soft but also flame retardant material, without halogen and resistant to oil, UV rays, chemical and environmental agents. All these features make this product particularly advised for outdoor use, even in extreme conditions, thanks to its operative temperature from -90° up to +180°C. The C726 PUR Super is our first Cat.7A cable for next-generation 1000 MHz data transmission.

tasker®

...a project further...

NEW

New 50Ω and Komby Cables

		C538	RG214 U	TSK1070 PVC	
APPLICATION:		Low Loss for Wi-Fi and RF	Professional RF	IP Camera installation and integrated Systems	
INNER CABLES	n° Cond.			1x S./F.T.P. Cat.7	12G-SDI Coax Video
NUMBER OF CONDUCTORS		1	1	8	1
NOMINAL SECTION	mm²	1X5,50 CU	1X3,09 Silver Plated Copper	4x2x0,14	1x0,88
CONDUCTOR FORMATION	mm	7x1,00 OFC	7x0,75 OFC	7x0,16 CU OFC	7x0,40 CU OFC
CORE INSULATION	ø mm	7,25 Gas Expanded PE	7,25 Compact PE	1,05 Foam Skin PE	4,80 Foam PE
SHIELDING	type/coverage	CU Foil 100% +CU Braid 73%	Double Silver Plated Copper Braid 96% + 98%	AL Foil tape on each pair 100% + CS Braid 65%	Double CS Braid 89% and 86%
INNER SHEATH	mm			6,30	7,10 PVC
TOTAL SHEATH	mm	10,30 PVC	10,80 PVC		19,50 PVC
PACKAGING	m	100/250	100/250	100/300/500	
PAIR CAPACITY	pF/m.				
CAPACITY Core/Shield	pF/m.	80	100	44,00	53,00
CONDUCTOR RESISTANCE	Ω/Km	3,19	6,00	143,00	21,00
PROPAGATION VELOCITY	%	84,00	66,00	77,00	86,00
MAX RATED VOLTAGE	V.	49	49		49
IMPEDANCE	Ω	50	50	100	75
OPERATIVE TEMPERATURE	°C	-15/+70	-15/+70		-20/+70
Standards:				RoHS2 2011/65/UE and 2015/863UE	

Products description

Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in **PVC extra morbido** per regie mobili o con guaina in **Poliuretano**, specifica per uso **OUTDOOR**, con o senza armatura metallica per interrimento non protetto anche in presenza di roditori.

Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an **extra soft PVC** sheath, perfect for broadcast on the road or with a **PUR** sheath for an **OUTDOOR use**, with or without metallic armor for unprotected landfill and in presence of rodents too.



Connectors





tasker®


...a project further...

NEW

Komby Cables - An Integrated Solution for any Application

** Production on demand

		** C734 Super		** C735 Super	
APPLICATION:		Integrated Systems that require Cat.7, and Power		Integrated Systems that require Cat.7, and Power	
INNER CABLES	n° Cond.	S./F.T.P. Cat.7	Power	2x S./F.T.P. Cat.7	Power
NUMBER OF CONDUCTORS		8	3	8x2	3
NOMINAL SECTION	mm²	4x2x0,14	3x1,50	4x2x0,14	3x2,50
CONDUCTOR FORMATION	mm	7x0,16 CU OFC	28x0,25 CU OFC	7x0,16 CU OFC	48x0,25 CU OFC
CORE INSULATION	ø mm	1,00 Foam Skin PE	2,30 PVC	1,00 Foam Skin PE	3,20 PVC
SHIELDING	type/coverage	AL Foil tape on each pair 100% + CS Braid 65%		AL Foil tape on each pair 100% + CS Braid 65%	
INNER SHEATH	mm	6,40	6,20	6,30	8,30
		PVC Flame Retardant		PVC Flame Retardant	
TOTAL SHEATH	mm	16,50		19,20	
		PVC Flame Retardant		PVC Flame Retardant	
PACKAGING	m	100/300/500		100/300/500	
CONDUCTOR RESISTANCE	Ω/Km	138	12,50	138	6,41
MAX RATED VOLTAGE	V.		49		49
IMPEDANCE	Ω	100		100	
OPERATIVE TEMPERATURE	°C		-20/+70		-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE			

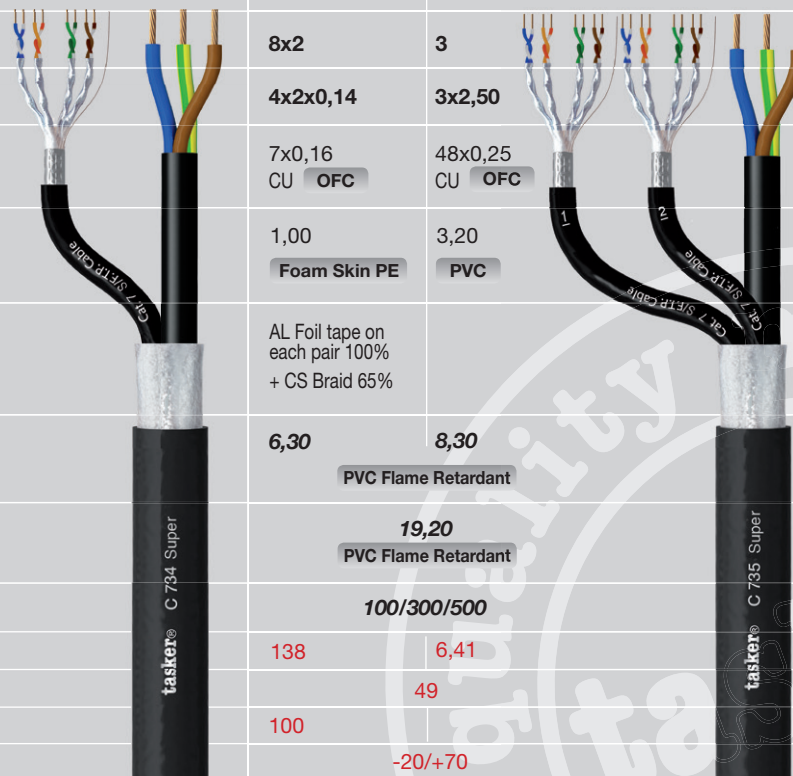

Connectors



NE8MX6
max. ø 9,5 mm.

Products description

Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in **PVC extra morbido** per regie mobili o con guaina in **Poliuretano**, specifica per uso **OUTDOOR**, con o senza armatura metallica per interrimento non protetto anche in presenza di roditori.

Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an **extra soft PVC** sheath, perfect for broadcast on the road or with a **PUR** sheath for an **OUTDOOR use**, with or without metallic armor for unprotected landfill and in presence of rodents too.



tasker®

...a project further...

NEW

Komby Cables - An Integrated Solution for any Application

		C743			C 747 PVC
APPLICATION:		Integrated Systems that require Cat.7, digital Audio and Power			Multi Cat.7 for LAN Installation and Digital Audio
INNER CABLES	n° Cond.	3x S./F.T.P. Cat.7	2x Digital Audio	Power	4x Cat.7 S./F.T.P.
NUMBER OF CONDUCTORS		8x3	2	3	8x4
NOMINAL SECTION	mm²	4x2x0,14	2x0,22	3x2,50	4x2x0,14
CONDUCTOR FORMATION	mm	7x0,16 CU OFC	28x0,10 CS OFC	48x0,25 CU OFC	7x0,16 CU OFC
CORE INSULATION	ø mm	1,00 Foam Skin PE	1,50 PPE	3,90 PVC	1,00 Foam Skin PE
SHIELDING	Type and Coverage	AL Foil tape on each pair 100% + CS Braid 65%	CU Spiral 100% + Drain wire		AL Foil tape on each pair 100% + CS Braid 65%
INNER SHEATH	mm	6,40	4,40		6,30
		PVC Flame Retardant			PVC Flame Retardant
TOTAL CABLE SHEATH	mm	20,80			19,00
		PVC Flame Retardant			Soft PVC
PACKAGING	m	100/300/500			100/300/500
CONDUCTOR RESISTANCE	Ω/Km	148	79,15	6,41	138
PAIRS CAPACITY	pF/m	47	50		44
IMPEDANCE	Ω	100	110		100
MAX RATED VOLTAGE	V.		49		49
OPERATIVE TEMPERATURE	°C		-20/+70		-15/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE			
Products description		Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in PVC extra morbido per regie mobili o con guaina in Poliuretano, specifica per uso OUTDOOR, con o senza armatura metallica per interrimento non protetto anche in presenza di roditori.			Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an extra soft PVC sheath, perfect for broadcast on the road or with a PUR sheath for an OUTDOOR use, with or without metallic armor for unprotected landfill and in presence of rodents too.



Connectors



tasker



Nautical Marine Audio and Video Cables



tasker® TSK 403 CPR Coaxial B2a Class
Sheath: **LSZH** CPR



tasker® C128 CPR
C 128 CPR Section: 2x0,35 mm² - Ø 6,10 mm - CPR Eca Class
Sheath: **CPR**



tasker® TSK 1039 PUR
TSK 1039 PUR Section: 2x0,50 mm² - Ø 6,40 mm
Sheath: **PUR**



tasker® RGB 75 L.S.Z.H. Section: 1x0,08 mm² (75Ω) - Ø 2,8 mm
Sheath: **LSZH**



tasker® C722 CPR B2ca
C 722 CPR B2ca Section: 4x2x0,25 mm² - 7,50 mm - Cat. 6 CPR B2ca Class
Sheath: **LSZH** CPR



tasker® C862
C 862 Section: 2x2x0,35 mm² - Ø 7,50 mm
Sheath: **PUR**



tasker® TSK1079 CPR Cca
TSK 1079 CPR Cca Dimension: 1,00/4,80/6,80 mm - 75Ω - HD SDI CPR Cca Class
Sheath: **LSZH** CPR



tasker® TSK71

Extra Soft silicone rubber
TSK71 Section: 2x0,50 mm² - Dimension 2,1x4,2 mm

TSK72 Section: 2x0,75 mm² - Dimension 2,4x4,8 mm

TSK73 Section: 2x1,50 mm² - Dimension 2,5x5,0 mm



tasker® TSK 402 CPR Coaxial B2a Class
TSK 402 CPR Cca Section: 2x1,50 mm² - Ø 7,80 mm - CPR Cca Class
Sheath: **LSZH** CPR



tasker® TSK 106 CPR
TSK 106 CPR Section: 2x4,00 mm² - Ø 11,00 mm - CPR Eca Class
Sheath: **CPR**



tasker® TSK 1038 L.S.Z.H. Section: 2x0,35 mm² - Ø 6,30 mm
Sheath: **LSZH**



tasker® C726 PUR Super S/FTP Cat.7A CcaB
C 726 PUR Super Section: 4x2x0,26 mm² - 8,70 mm - Cat. 7A
Sheath: **PUR**



tasker® RG 59 CPR
RG 59 CPR Dimension: 0,58/3,70/6,20 mm - 75Ω - CPR Eca Class
Sheath: **CPR**



tasker® C 8025 CPR
C 8025 CPR Section: 8x0,25 mm² - Ø 7,50 mm - CPR Eca Class
Sheath: **CPR**



tasker® C 231 L.S.Z.H. Section: 1x0,08 (75Ω) + 2x0,75 mm² - Ø 5,50 mm
Sheath: **LSZH**

● ALL PRODUCTS ARE READY ON STOCK
● ANY COLOR AND SPECIAL MATERIAL AVAILABLE ON DEMAND
● 100% MADE IN ITALY

