

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C512 EIA RS 422 Shielded Cable

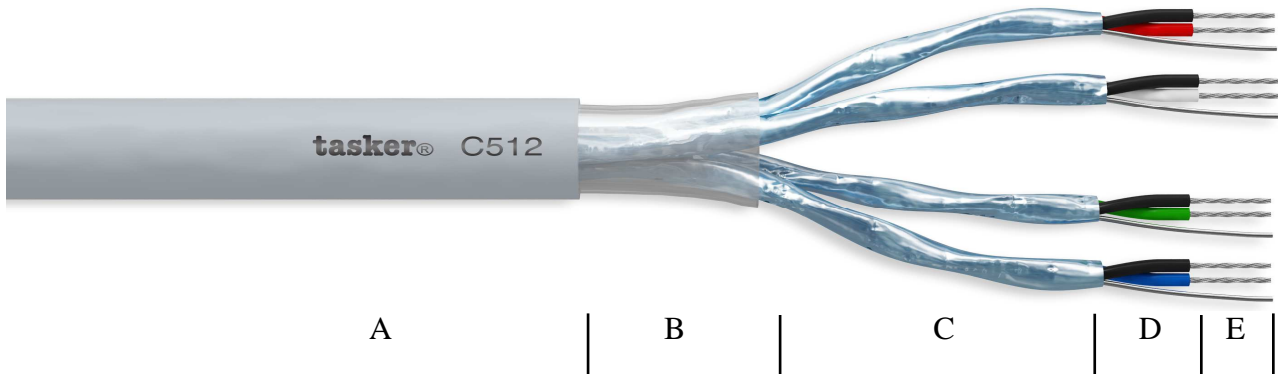

CATEGORY Industrial protocol Shielded Cable (See Data Network Catalogue)
APPLICATIONS Industrial Electronic Equipment conform to standard EIA RS422

- A:** Grey Soft **Flame Retardant PVC**.
Outer cable diam. Ø 9,40 (±0,10) mm.
- B:** **Shielded pairs grouped with not woven polyester tape.**
- C:** Single pairs are **Shielded with Aluminum/PET tape on each pair,** covering 100% + tinned copper drain wire.
- D:** The cores are stranded in a pairs with 30 twist/mt, insulation with PEE.
Diam. Ø 1,50 (±0,10) mm. Pairs color code: Black/Red, Black/Red
Black/Red, Black/Red.
- E:** O.F.C. tinned copper formation 7x0,20 mm.
Nom. Cross section 4x2x0,22 mm².

MARKING **tasker® C512 4x2x0,22 24AWG O.F.C. EIA RS 422 INDIVIDUALLY SHIELDED TWISTED CABLE FirestoP ITALY**

CUSTOM PRODUCTION This product may be custom produced also in **PVC, PE, PUR,** with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	50 pF/mt
Capacity Core/Shield	100 pF/mt
Impedance	100 Ω
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 15.02.18
10% measurement tolerance, unless otherwise indicated		