




## Technical Datasheet

# tasker® TSK902 CPR Cca – 2x2x0,28 mm<sup>2</sup> Fix Installation Digital Audio Multipair Cable

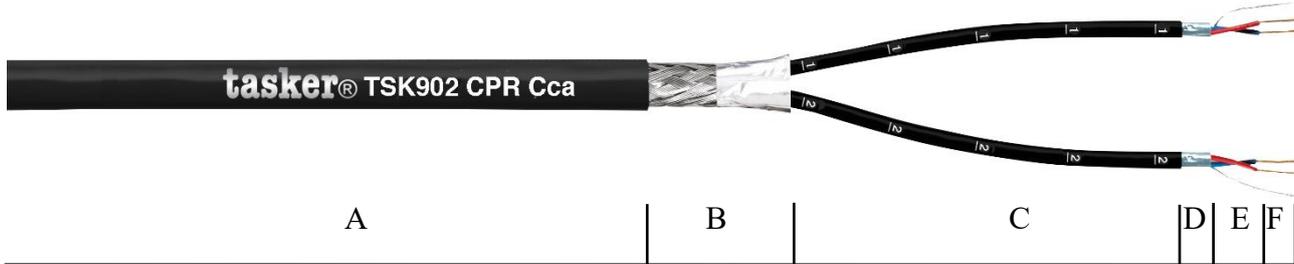

**CATEGORY** Digital Multipair Audio Cable (See News brochure)  
**APPLICATIONS** Audio Mixers and Benches

- A:** Black **L.S.Z.H.** polymer grade M1. Flame Retardant and halogen Free. Outer cable Ø: 10,50 (±0,20) mm.
- B:** Total shielding with aluminum foil and tinned copper braid covering 80%.
- C:** The single pairs are isolated with black **L.S.Z.H.**, numbered from one to the number of elements and wrapped with proper fillers. Pairs diam. Ø 3,80 (±0,20) mm.
- D:** The single pair are shielded with aluminum tape covering 100% + tinned copper drain wire.
- E:** The single cores are insulated with **foam PE**, colored one blue and one red. Diam. Ø 1,50 (±0,20) mm.
- F:** O.F.C. red copper formation 1x0,60 mm (23/1 AWG). Nom. Cross section 2x2x0,28 mm<sup>2</sup>.

**MARKING** **tasker®** TSK902 CPR Cca - 2x2x0,28 mm<sup>2</sup> - Digital Audio Multipair cable  
AES/EBU 110Ω – CPR – Cca – s2–d2–a2 – FirestopP® - Halogen Free – Made in Italy

### Cable Properties

<b>Conductor Resistance</b>	70 Ω/Km	<b>Impedance</b>	110 Ω
<b>Capacity Core/Core</b>	45 pF/m	<b>Max Rated Voltage</b>	49 V
<b>Capacity Core/Shield</b>	100 pF/m	<b>Test Voltage</b>	1500 V
<b>Operative Temperature</b>	-20/+80°C	<b>Min. Bending Radius (Fixed)</b>	7 x O.D.

<b>USE</b>	X	Indoor	Interno Edificio	<b>INSTALLATION</b>	X	Fixed	Fissa	<b>INFORMATION</b>	X	RoHS2 Compliant
<b>Impiego</b>	X	Outdoor Limited	Esterno Limitato	<b>Posa</b>		Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	X	Ver. B / 11.12.24
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			