

MILAN S.r.l. a socio Unico


Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Technical Datasheet

tasker® C146 Special Video Cable 75Ω

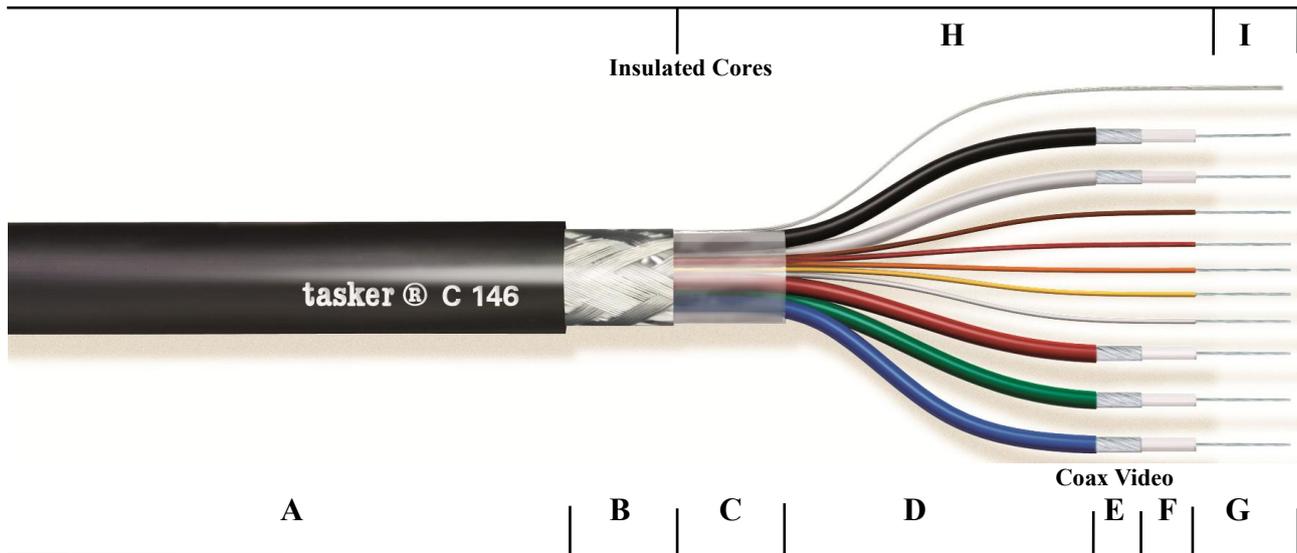

CATEGORY Special Video Cable 75Ω (See Video Catalogue)
APPLICATIONS VGA and XGA

- A:** Black **Flame Retardant PVC**.
Outer Diam. Ø 9,00 (±0,20) mm.
- B:** O.F.C. Tinned Copper Braid Shielding, covering 80% + drain Wire.
- C:** Grouping with unweaved polyester tape.

5x Coax Video 75Ω:

- D:** Sheath in **PVC**. Colored: Red, Green, Blue, White, Black.
Diam. Ø 2,40 (±0,20) mm.
- E:** O.F.C. tinned copper spiral shielding, covering 100%.
- F:** Insulated in PPE. Diam. Ø 1,40 (±0,20) mm.
- G:** Stranded in O.F.C. tinned copper formation 7x0,12 mm.
Nom. cross section 5x0,08 mm². (28 AWG)

5x Insulated Cores:

- H:** Sheath in **PVC**. Colored: White, Brown, Red, Orange, Yellow.
Diam. Ø 0,90 (±0,20) mm.
- E:** Stranded in O.F.C. tinned copper formation 7x0,12 mm.
Nom. Section 5x0,08 mm². (28 AWG)

MILAN S.r.l. a socio Unico

Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 RE.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

MARKING

tasker® C146 5x0,75 OHM +5x0,08 mm² S-VGA - XGA Video Cable

MADE IN ITALY

CUSTOM PRODUCTION

This product may be custom produced also in **LSZH, PE, PUR,** with or without Metallic Armor.

General Properties

Conductors Resistance	203 Ω/Km
Impedence	75 Ω
Velocity of Propagation	66 %
Capacity Core/Shield	67 pF/m
Operative Temperature	-20/+70°C

Attenuation dB/100 m.

50 MHz	19,70
100 MHz	28,70
200 MHz	42,00
400 MHz	61,20
800 MHz	88,50
1000 MHz	105,00

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			