

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com


Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it



Technical Datasheet

tasker® C144 - 1x0,08 (75Ω) +4x0,50 mm² Controls **Firestop®**

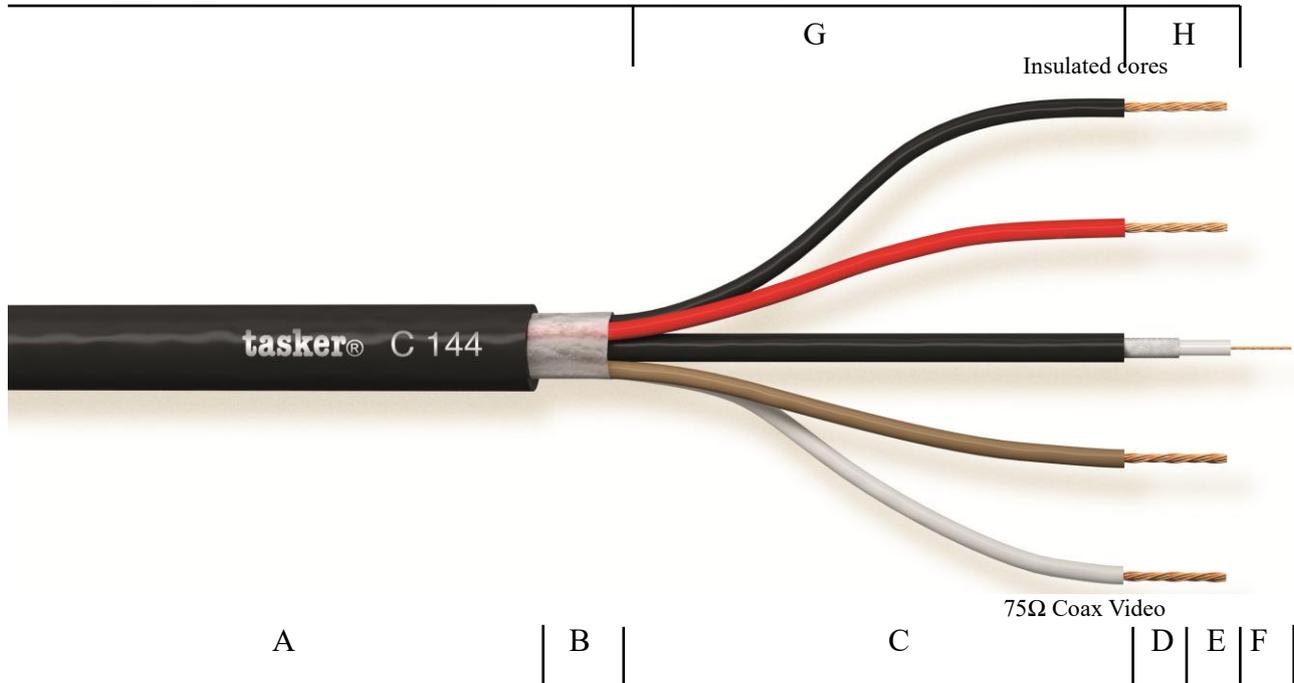

CATEGORY Komby Cable 75Ω (See video Catalogue)
APPLICATIONS Video installations, Security and Video Cameras.

- A:** Black **Flame Retardant PVC** sheath.
Outer cable diam. Ø 8,50 (± 0,20) mm.
- B:** The conductors are grouped together with waste filler between conductors and wrapped with not woven polyester base tape.

75Ω Coaxial Cable:

- C:** Black **Flame Retardant PVC**.
Outer cable diam. Ø 2,80 (±0,20) mm.
- D:** Shielding O.F.C. tinned copper spiral covering 100%.
- E:** Core Insulation with PEE. Diam. Ø 1,50 (±0,20) mm.
- F:** Stranded formation in O.F.C. Red Copper 10x0,10 mm.
Nom. Cross section 1x0,08 mm². (28 AWG)

Free conductors:

- G:** Sheaths in **Flame Retardant PVC**. Colored: Black, Red, White, Brown.
- H:** Stranded O.F.C. Red Copper Formation 16x0,20 mm.
Nominal Cross Section 4x0,50 mm². (20 AWG)

MILAN S.r.l. a socio Unico

Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

MARKING

tasker® C144 - 1x0,75Ω + 4x0,50 mm² - SPECIAL VIDEO CABLE

FirestoP® - MADE IN ITALY

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR,** with or without Metallic Armor.

General properties

0,50 mm² Conductors	38,00 Ω/Km
Coax Conductor Resistance	203 Ω/Km
Impedence	75 Ω
Capacity Core/Shield	67 pF/m
Operative Temperature	-20/+70°C

Attenuation dB/100 m.

50 MHz	17,50
100 MHz	25,51
200 MHz	40,53
400 MHz	59,10

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			