


FirestoP®

Technical Datasheet



tasker® C287 - 2x2x0,22 mm² - Audio Quad Cable

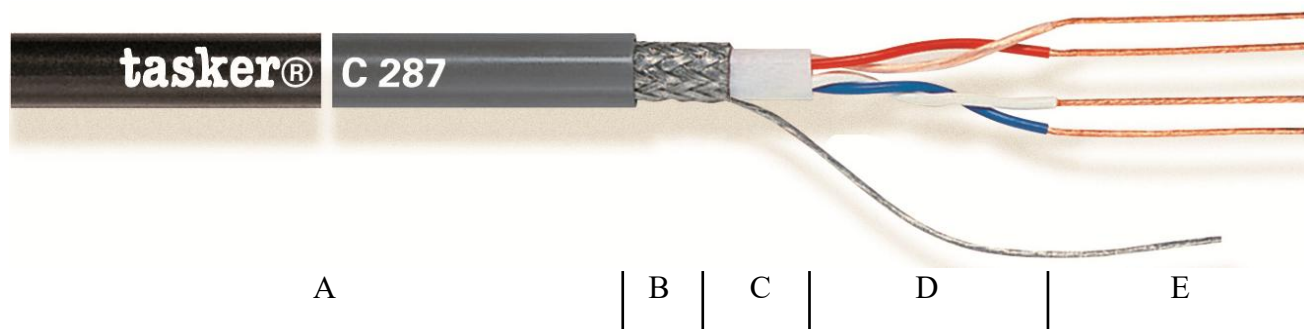

CATEGORY Audio Quad Cable (See Audio Catalogue)
APPLICATIONS Audio DMX and Starquad premade cables

- A:** Soft **Flame Retardant PVC** Sheath - available in different color.
Outer cable Diam. Ø 6,50 (±0,20) mm.
- B:** Braided Shielding O.F.C. tinned copper covering 100% + Drain Wire.
- C:** The cores are stranded in a pair with textile waste filler between conductors and wrapped with not woven polyester based tape.
- D:** Cores Insulation with compact XLPE – Diam. Ø 1,20 (±0,20) mm.
Colored transparent-red and one transparent-Blue.
- E:** O.F.C. red copper - formation 28x0,10 mm.
Nom. Cross section 2x2x0,22 mm².

MARKING

tasker® C287 2x2x24 AWG O.F.C. PROFESSIONAL NOISELESS DMX AUDIO
CABLE LOW CAPACITY

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	65 pF/mt
Capacity Core/Shield	120 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego	X	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato
INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena
INFORMATION	X	RoHS3 Compliant	
Informazioni	X	Ver. B / 16.05.19	