




MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**Technical Datasheet**    
**tasker® FSC6022 – 6x0,22 mm<sup>2</sup>**  
**Flexible Multi Conductor Cable**

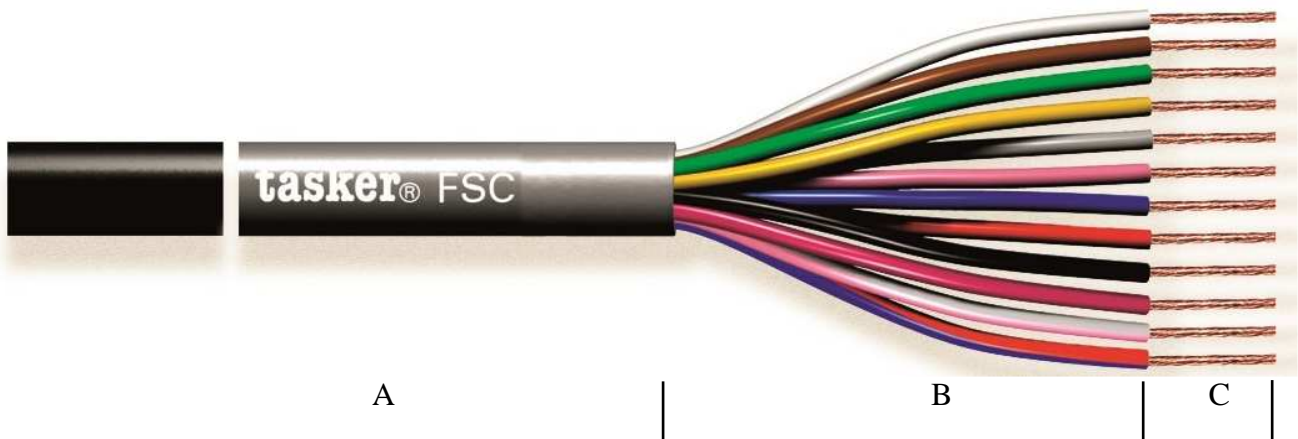

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture do not represent the real number of conductors.  
 Multi Conductor Cable ( See Electronics Catalogue)  
 Wiring and Electronics.

- A:** Soft **Flame Retardant PVC** Sheath. Available in different color.  
Outer Diam. Ø: 4,90 (±0,20) mm.
- B:** Cores Insulation with Soft **Flame Retardant PVC** sheath.  
DIN 47100 Standards. Color Code: White, Brown, Green, Yellow,  
Grey, Pink. Diam. Ø 1,10 (±0,20) mm.
- C:** Stranded O.F.C. Red Copper formation 7x0,20 mm.  
Nom. Cross section 6x0,22 mm<sup>2</sup>.

**MARKING**  
**CUSTOM**  
**PRODUCTION**

**tasker® FSC 6022 6x0,22 mm<sup>2</sup> FLEX SHEATHED CABLE Firestop®** Made Italy  
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**,  
 with or without Metallic Armor.

**Cable Properties**

|                              |            |
|------------------------------|------------|
| <b>Conductor Resistance</b>  | 79,15 Ω/Km |
| <b>Max Rated Voltage</b>     | 49 V       |
| <b>Operative Temperature</b> | -20/+70°C  |

|                |          |                       |                   |                     |          |                      |                       |                     |          |                   |
|----------------|----------|-----------------------|-------------------|---------------------|----------|----------------------|-----------------------|---------------------|----------|-------------------|
| <b>USE</b>     | <b>X</b> | Indoor                | Interno Edificio  | <b>INSTALLATION</b> | <b>X</b> | Fixed                | Fissa                 | <b>INFORMATION</b>  | <b>X</b> | RoHS2 Compliant   |
| <b>Impiego</b> | <b>X</b> | Outdoor Limited       | Esterno Limitato  | <b>Posa</b>         | <b>X</b> | Flexible Limited     | Flessibilità limitata | <b>Informazioni</b> | <b>X</b> | Ver. A / 06.07.16 |
|                |          | Outdoor               | Esterno           |                     |          | Dynamic (Drag Chain) | Mobile in Catena      |                     |          |                   |
|                |          | Outdoor Direct Burial | Esterno Interrato |                     |          | Dynamic (Torsion)    | Mobile in Torsione    |                     |          |                   |