

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com


Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Technical Datasheet

tasker® C283 – 1x2x0,22 + 3x1,50 mm²

Special DMX 110 Ohm Cable

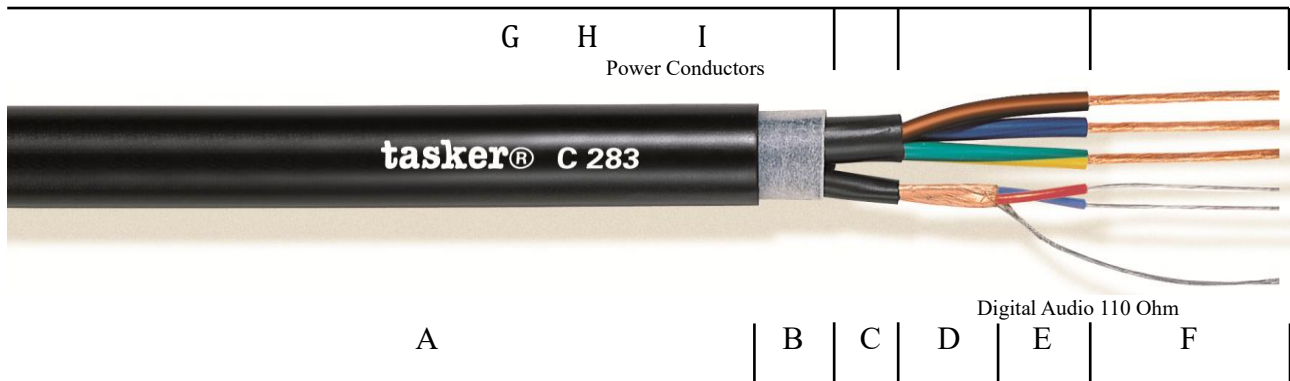

CATEGORY DMX + Power (See Audio Catalogue)

APPLICATIONS Active Digital Audio Cables for professional mobile use and stage.

- A:** Black **Flame-Retardant PVC**. Outer cable Diam. Ø 14,00 (±0,20) mm.
- B:** The single sheath is stranded with waste filler between conductors and wrapped with not woven polyester tape.

Digital Audio 110 Ohm Pair:

- C:** Black **Flame-Retardant PVC**. Diam. Ø 4,00 (±0,20) mm.
- D:** Shielding O.F.C. red copper Spiral covering 100% + O.F.C. tinned copper Drain Wire.
- E:** Core Insulation with PEE, colored one Red and one Blue.
Diam. Ø 1,50 (±0,20) mm.
- F:** O.F.C. tinned copper - formation 28x0,10 mm.
Nom. Cross section 1x2x0,22 mm².

Three Power Conductors:

- G:** Black **Flame-Retardant PVC**. Diam. Ø 7,20 (±0,20) mm.
- H:** Core Insulation with **Flame Retardant PVC** colored:
Brown, Blue and Yellow/Green. Diam. Ø 3,00 (±0,20) mm.
- I:** O.F.C. red copper formation 48x0,20 mm.
Nom. Cross section 3x1,50 mm².

MARKING tasker® C283 1x2x0,22 + 3x1,50 mm² Digital DMX Cable – Made in Italy

MILAN S.r.l. a socio Unico

Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

**CUSTOM
 PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR,** with or without Metallic Armor.

Cable Properties

Digital Audio Cables Resistance	79,15 Ω/Km
Digital Audio Impedance	110 Ω
Power Conductor Resistance	12,50 Ω/Km
Capacity Core/Core	50 pF/m
Capacity Core/Shield	89 pF/m
Operating Voltage	300 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.04.26
		Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			