

MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74  
20090 Cusago (MI) Italy  
T. +39 02 9039.4556-4158  
F. +39 02 9039.4551  
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione


Viale Europa 72 Strada F12  
20090 Cusago (MI) Italy  
T. +39 02 9039.0037-0059  
F. +39 02 9039.0049  
www.tasker.it



## Technical Datasheet

# tasker® C352 – 52x2x0,22 mm<sup>2</sup>

### Individually Shielded Multi Pair Cable

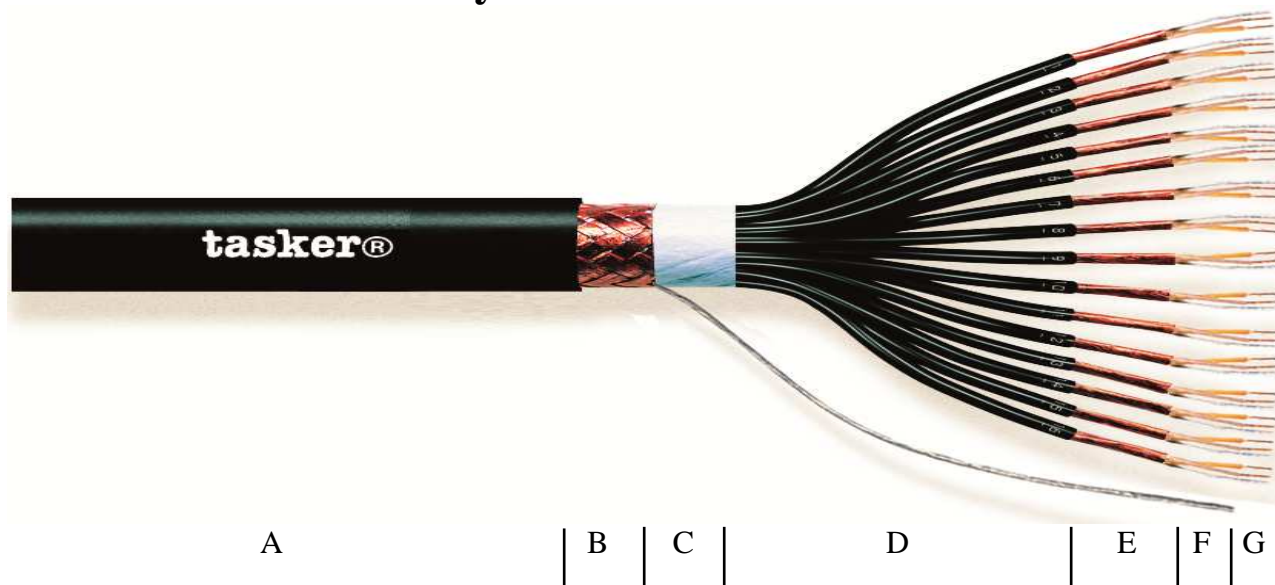

**NOTE** The picture don't represent the real number of conductors  
**CATEGORY** Multipair Audio Cable (See Audio Catalogue)  
**APPLICATIONS** Audio Mixers, Benches and Audio Balanced multi sockets.

- |           |  |
|-----------|--|
| <b>A:</b> | Black Soft <b>PVC</b> sheath.<br>Outer cable dimension Ø 29,00 (±0,20) mm.                         |
| <b>B:</b> | Total Shielding in O.F.C. red copper Braid covering 85%.<br>+ Tinned Copper Drain Wire.            |
| <b>C:</b> | Total taping in not woven polyester tape.  |
| <b>D:</b> | Inner sheaths in PVC, Black and numbered. Diam. Ø 3,00 (±0,20) mm.                                 |
| <b>E:</b> | Shielding on each single pair in O.F.C. red copper Spiral covering 100%.                           |
| <b>F:</b> | Core Insulation with solid PE, colored one Transparent and one Yellow.<br>Diam. Ø 1,00 (±0,20) mm. |
| <b>G:</b> | O.F.C. red copper formation 28x0,10 mm.<br>Nom. Cross section 52x2x0,22 mm <sup>2</sup> .          |



MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**MARKING**

**tasker® C352 52x2x0,22mm<sup>2</sup> PROFESSIONAL SHIELDED MULTIPAIR CABLE FOR AUDIO MIXER MADE IN ITALY**

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	75 pF/mt
<b>Capacity Core/Shield</b>	160 pF/mt
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			