

MILAN S.r.l. a socio unico


Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet **Firestop®**

### **tasker® TSK1063 Special Video Cable 75Ω**

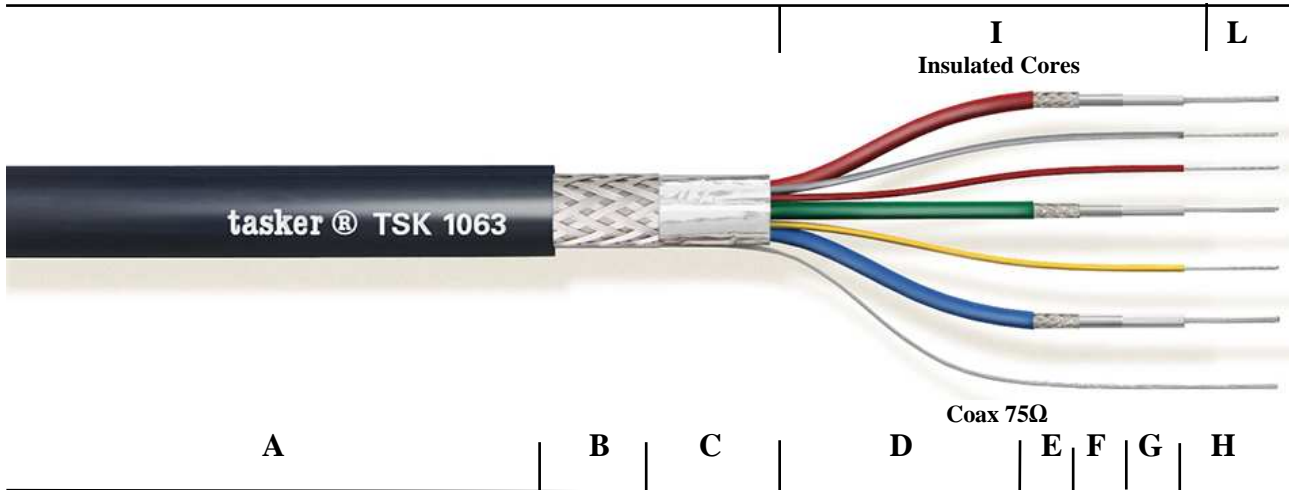

**CATEGORY** Special Video Cable 75Ω (See Video Catalogue)  
**APPLICATIONS** R.G.B. video + control/Switch.

- A:** Night Blue Soft **Flame Retardant PVC**.  
Outer Diam. Ø 8,70 (±0,20) mm.
- B:** O.F.C. Tinned Copper Braid Shielding, covering 80% + drain Wire.
- C:** Aluminum foil tape covering 100%.

#### **3x Coax 75Ω:**

- D:** Sheath in **PVC**. Colored: Red, Green and Blue.  
Diam. Ø 2,90 (±0,20) mm.
- E:** O.F.C. tinned copper braid shielding, covering 90%.
- F:** Aluminum foil tape covering 100%.
- G:** Insulated in PPE. Diam. Ø 1,70 (±0,20) mm.
- H:** Stranded in O.F.C. tinned copper formation 7x0,15 mm.  
Nom. section 3x0,08 mm<sup>2</sup> (75Ω).

#### **3x Insulated Cores:**

- I:** Sheath in **PVC**. Colored: Grey, Red, Yellow.  
Diam. Ø 1,20 (±0,20) mm.
- L:** Stranded in O.F.C. tinned copper formation 7x0,20 mm.  
Nom. section 3x0,22 mm<sup>2</sup>.

MILAN S.r.l. a socio unico

**Head Office – Export department:** **Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa, 74 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059  
 F. +39 02 9039.4551 F. +39 02 9039.0049  
 www.taskercables.com www.tasker.it

**MARKING**

**tasker®** TSK1063 – 3x75Ω + 3x0,22 mm<sup>2</sup> professional Shielded high definition Video cable

**CUSTOM PRODUCTION**

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

**General Properties**

<b>Coax Conductors Resistance</b>	140 Ω/Km
<b>Impedence</b>	75 Ω
<b>Velocity of Propagation</b>	66 %
<b>Capacity Core/Shield</b>	65 pF/m
<b>Free Conductors Resistance</b>	79,15 Ω/Km
<b>Operative Temperature</b>	-20/+70°C

**Attenuation dB/100 m.**

<b>50 MHz</b>	18,50
<b>100 MHz</b>	27,50
<b>200 MHz</b>	40,30
<b>400 MHz</b>	59,50
<b>800 MHz</b>	86,50
<b>1000 MHz</b>	101,50

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			