


Technical Datasheet RoHS₃

tasker® C734 L.S.Z.H. – Komby LAN Cable

FirestoP®

Cat.6A F/F.T.P. LAN + POWER

Halogen Free

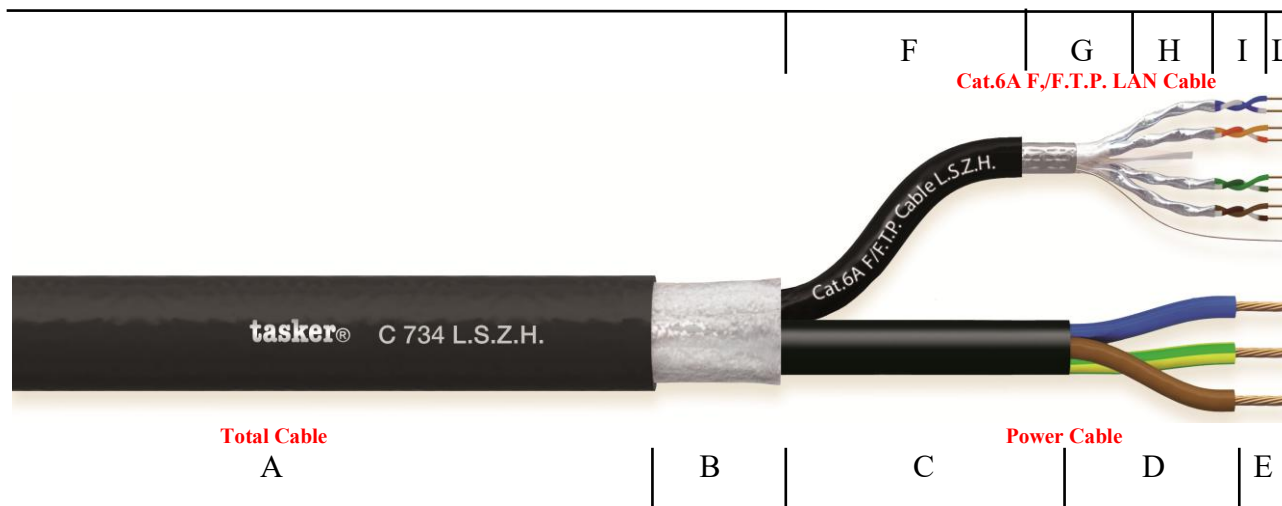

CATEGORY

Komby LAN Cable (See Data Network Catalogue)

APPLICATIONS

Broadcast and LAN installation

- A:** Black L.S.Z.H. Sheath – Fire Resistant and Halogen Free.
Outer cable Dim. Ø 17,60 (±0,20) mm.
- B:** The inner elements are stranded together with polyester based tape.

3x1,50 mm² Power Cable

- C:** Black L.S.Z.H. Inner sheath – Fire Resistant and Halogen Free.
Diam. Ø 7,00 (±0,20) mm.
- D:** L.S.Z.H. Conductors insulation. Diam. Ø 2,50 (±0,20) mm.
Color Code: Blue, Brown and Yellow/Green.
- E:** Stranded formation of 30x0,25 mm in O.F.C. Red Copper.
Nom. Cross section 3x1,50 mm².

4x2x0,25 mm² Cat.6A F/F.T.P. LAN Cable

- F:** Black L.S.Z.H. Inner sheaths – Fire Resistant and Halogen Free.
Diam. Ø 7,60 (±0,20) mm.
- G:** Total shielding with Aluminum Foil tape covering 100%.
+ Drain Wire and total taping of the pairs.
- H:** The four pairs are individually shielded with aluminum foil tape covering 100%.

MILAN S.r.l. a socio Unico
Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

- I:** Conductors' insulation in PEE, stranded to pairs.
 Diam. Ø 1,40 (±0,10) mm.
 Color Code: White/Blue, White/Orange, White/Green, White/Brown.
- L:** O.F.C. Red Copper stiff wire formation of 1x0,57 mm.
 Nom. Cross section 4x2x0,25 mm².

MARKING

tasker® C734 L.S.Z.H. – Cat. 6A F./F.T.P.+ 3x1,50 mm² - O.F.C.–
 KOMBY CABLE -10 GBIT Ethernet - Made in Italy

CUSTOM PRODUCTION

This product may be custom produced also in **PVC** polymer, **PE**, **PUR**,
 with or without Metallic Armor.

Cable Properties

Power Conduitors Resistance	12,50 Ω/Km
Cat. 6A Conduitors Resistance	75,85 Ω/Km
Min. benging Radius	10x O.D.
Max Pull Strenght	320N
Max Rated Voltage	49V
Operative Temperature	-25/+75°C

USE	X	Indoor	Interno Edificio
Impiego	X	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 02.08.18