


Technical Datasheet **tasker®** TSK 1071 RG174 (50Ω) +2x Control Cable

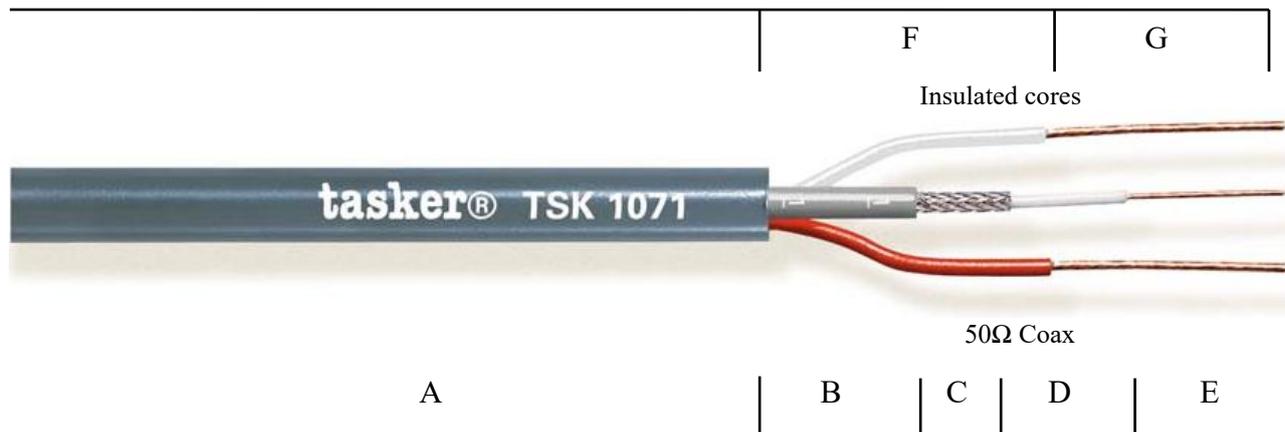

CATEGORY Komby Cable 50Ω
APPLICATIONS Digital Cameras, Video surveillance and Motorized Antennas.

A: Grey **Flame Retardant PVC** sheath.
Outer Diam. Ø 6,70 (± 0,20) mm.

RG174 (50 ohm):

B: Grey PVC Sheath. Diam. Ø: 2,80 (± 0,20) mm.
C: Braid shielding in O.F.C. tinned copper covering 88%.
D: Insulation in compact PE. Diam. Ø 1,50 (± 0,20) mm.
E: Stranded CW formation 7x0,16 mm.
Nom. Cross section 1x0,14 mm². (26 AWG)

Insulated cores:

F: Grey **Flame Retardant PVC** sheath. Colored one white and one red.
Diam. Ø: 2,00 (± 0,20) mm.
G: Stranded formation in O.F.C. tinned copper of 16x0,20 mm.
Nom. Cross section 2x0,50 mm². (20 AWG)

MARKING **tasker®** TSK1071 - 1x0,50 Ohm + 2x0,50 mm² - Special Coax Cable –
FirestoP® - Made in Italy

CUSTOM PRODUCTION This product may be custom produced also with **L.S.Z.H.** polymer, **PE** or **PUR** sheath, with or without Metallic Armor.

MILAN S.r.l. a socio Unico

Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

General properties

0,50 mm² Conductors	38 Ω/Km
Coax Conductor Resistance	290 Ω/Km
Impedence	50 Ω
Capacity Core/Shield	100 pF/m
Operative Temperature	-20/+70°C

Attenuation dB/100 m.

100 MHz	25,8
200 MHz	38,2
400 MHz	54,9
800 MHz	77,0
1000 MHz	87,5

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			