

MILAN S.r.l. a socio Unico


Head Office - Export Department  
Viale Europa, 74  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.4556 - 4158  
www.taskercables.com

Ufficio Commerciale e Distribuzione  
Viale Europa, 72 Strada F12  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.0037 - 0059  
www.tasker.it

Capitale Sociale € 100.000,00 i.v.  
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154  
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14  
PEC: taskerpec@legalmail.it

## Technical Datasheet

### tasker® C287 - 2x2x0,22 mm<sup>2</sup> - Audio Quad Cable

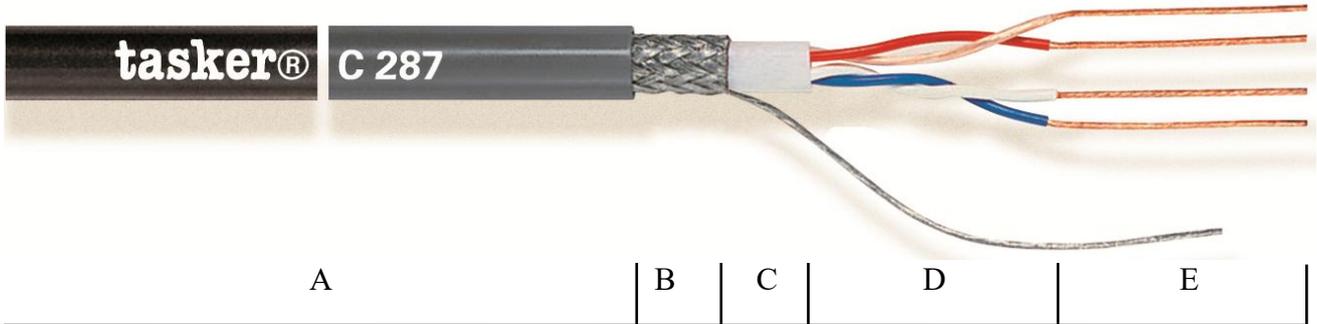

**CATEGORY** Audio Quad Cable (See Audio Catalogue)  
**APPLICATIONS** Audio DMX and Starquad premade cables

- A:** **Flame Retardant PVC Sheath** - available in different color.  
Outer cable Diam. Ø 6,50 (±0,20) mm.
- B:** Braided Shielding O.F.C. tinned copper covering 100% + Drain Wire.
- C:** The cores are stranded in a pair with textile waste filler between conductors and wrapped with not woven polyester based tape.
- D:** Cores Insulation with compact XLPE – Diam. Ø 1,20 (±0,20) mm.  
Colored transparent-red and one transparent-Blue.
- E:** O.F.C. red copper - formation 28x0,10 mm.  
Nom. Cross section 2x2x0,22 mm<sup>2</sup>.

**MARKING** **tasker® C287 2x2x24 AWG O.F.C. PROFESSIONAL NOISELESS DMX AUDIO CABLE LOW CAPACITY – Made in Italy**

**CUSTOM PRODUCTION** This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

#### Cable Properties

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	65 pF/m
<b>Capacity Core/Shield</b>	120 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			