


## Technical Datasheet

# tasker® TSK 1060 Super – UL Style 20276

## HDMI 2.1 Cable with Ethernet 3D 4K

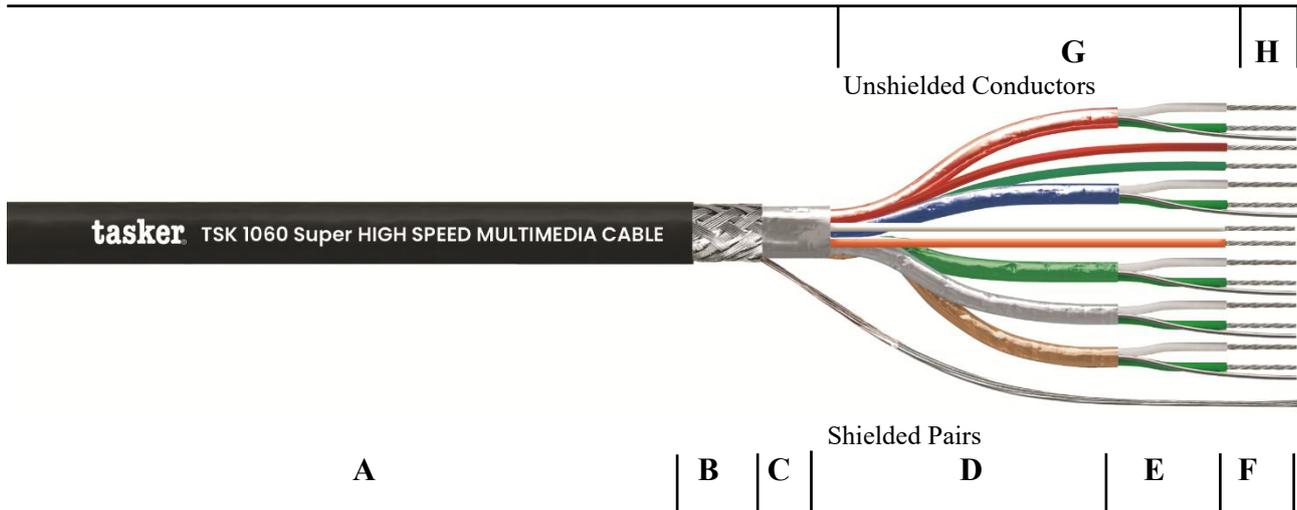

**CATEGORY** HDMI Cable  
**APPLICATIONS** High-definition video transmission with Ethernet on HDMI 2.1 protocol.

- A:** Black Soft PVC Sheath. Outer Diam. Ø 8,50 (±0,20) mm.
- B:** First Shield on the grouping in O.F.C. tinned copper Braid covering 80%.  
+ tinned copper stranded drain wire.
- C:** Second shield on grouping in aluminum/mylar tape covering 125%.

### Shielded Pairs

- D:** The pairs are shielded with colored aluminum/mylar tape covering 100% +  
tinned copper stranded drain wire.  
Color of the tape: red, blue, green, silver and gold.
- E:** Core insulated in foam PE smooth finished (skin).  
Colored one green and one white. Diam. Ø 1,25 (±0,20) mm.
- F:** Stranded O.F.C. tinned copper formation 7x0,16 mm.  
Nom section 5x2x0,14 mm<sup>2</sup>. (26 AWG).

### Unshielded Conductors

- G:** The 4 unshielded conductors are insulated with HDPE.  
Diam. Ø 0.90 (±0,20) mm.  
Colored red, green, white and orange.
- H:** All unshielded conductors are made of O.F.C. tinned copper,  
formation of 7x0,16 mm. Nom. Sections 4x0,14 mm<sup>2</sup>. (26 AWG)

**MILAN S.r.l. a socio Unico**

**Head Office - Export Department**  
Viale Europa, 74  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.4556 - 4158  
www.taskercables.com

**Ufficio Commerciale e Distribuzione**  
Viale Europa, 72 Strada F12  
20047 Cusago (MI) Italy  
Tel. +39 02 9039.0037 - 0059  
www.tasker.it

Capitale Sociale € 100.000,00 i.v.  
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154  
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14  
PEC: taskerpec@legalmail.it

**MARKING**

**tasker®** TSK 1060 Super – 5x2x26 + 1x2x26 + 2x26 AWG – O.F.C –  
HIGH SPEED DOUBLE SHIELDED MULTIMEDIA CABLE

**CUSTOM  
PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR,**  
with or without Metallic Armor.

**Cable Properties**

<b>Conductors Resistance</b>	148 Ω/km
<b>Impedance</b>	100 Ω
<b>Max Rated Voltage</b>	30 V
<b>Operative Temperature</b>	-15+70°C

**Attenuation dB/10m.**

From 1,0 to 825,0 MHz	5,0
From 825 to 2.475 MHz	12,0
From 2475 to 4125 MHz	20,0
From 4125 to 5,100 MHz	25,0

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<b>X</b>	Ver. D / 31.10.2023
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			