


## Technical Datasheet

# tasker® C185 4x2x0,22 mm<sup>2</sup>

## Shielded Twisted Pair Cable

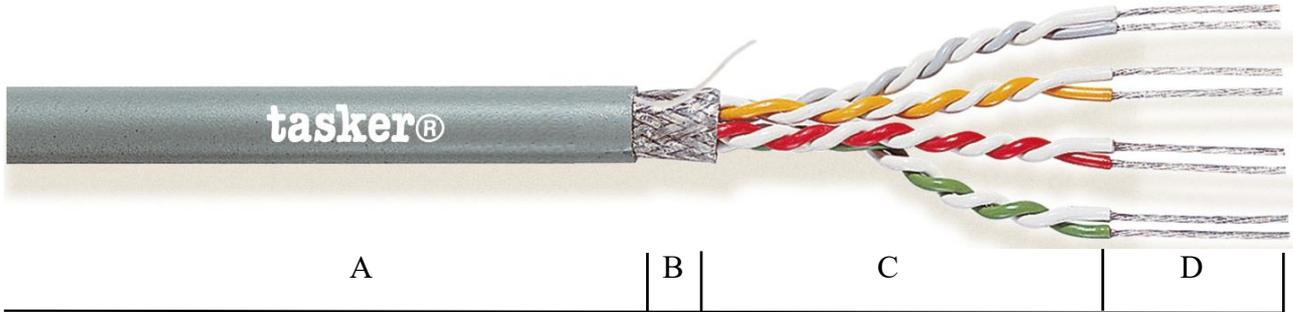

**CATEGORY** S.T.P. Cable (See Data Network Catalogue)  
**APPLICATIONS** Electronic and Data Transmission

- A:** Grey Soft PVC Sheath.  
Outer cable Ø: 6,80 (±0,20) mm.
- B:** Shielding in O.F.C. tinned copper Braid, covering 85%
- C:** The cores are stranded in a pair with 30 twist/m. and insulation with PVC. Diam. Ø 1,20 (±0,20) mm.  
Pair color code: White/ Grey, White/ Yellow, White/Red, White/Green.
- D:** O.F.C. tinned copper formation 7x0,20 mm.  
Nom. Cross section 4x2x0,22 mm<sup>2</sup>

**MARKING** tasker® C185 - 4x2x0,22 mm<sup>2</sup> - DATA TRASMISSION TWISTED PAIR SHELDED CABLE - MADE IN ITALY

**CUSTOM PRODUCTION** This product may be custom produced also in LSZH, PE, PUR, with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	110 pF/m
<b>Capacity Core/Shield</b>	160 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. B / 16.02.26
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			