

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it


Firestop®

Technical Datasheet

tasker® C732 – Komby Cable

2x Digital Audio + 2xCat.5e S./S.T.P.


RoHS₂
 2002/95/EC
 2011/65/UE

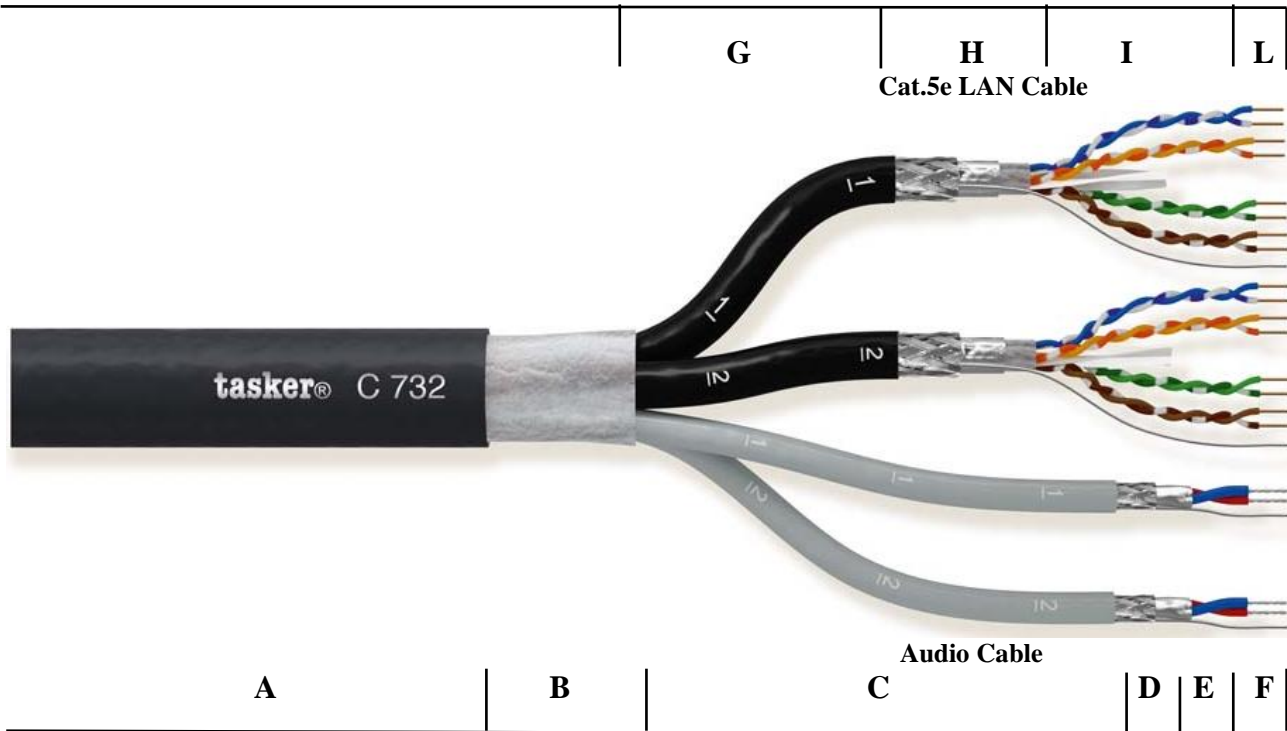

CATEGORY Komby LAN Cable (See Data Network Catalogue)
APPLICATIONS DMX and LAN installation

- A:** Black **Soft Flame Retardant PVC** Sheath.
Outer cable Diam. Ø 16,40 (±0,20) mm.
- B:** The inner elements are stranded together with polyester based tape.

2x(2x0,22) mm² Digital Audio

- C:** Grey inner sheaths **Soft Flame Retardant PVC**. Numbered 1 and 2.
RAL 7001- Numbered 1 and 2 - Diam. Ø 4,50 (±0,20) mm.
- D:** First shielding in O.F.C. tinned copper braid, covering 80% and second shielding with aluminum foil tape covering 100%.
- E:** Conductors insulation in PEE, colored one Blue and one Red, are stranded to a pair. Diam. Ø 1,50 (±0,20) mm.
- F:** Stranded formation of 7x0,20 mm in O.F.C. tinned Copper
Nom. Cross section 2x0,22 mm².

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

2x(4x2x0,22) mm² Cat.5e S./S.T.P. LAN Cable

- G:** Black **Soft Flame Retardant PVC** Sheath.
 Numbered 1 and 2. Diam. Ø 6,60 (±0,20) mm.
- M:** Total shielding with O.F.C. tinned copper braid covering 70%. The single pairs are stranded together.
- N:** The four single pair are shielded with aluminum foil tape covering 100%.
- O:** Conductors insulation in PEE, stranded to pairs.
 Diam. Ø 1,00 (±0,20) mm. RJ45 compatible. Color Code: White-Blue/Blue, White-Orange/Orange, White-Green/Green, White-Brown/Brown.
- P:** Stiff formation 1x0,51 mm in O.F.C. Red Copper.
 Nom. Cross section 4x2x0,22 mm².

MARKING

tasker® C732 – 2 Cat. 5e S./S.T.P. + 2 Digital Audio Pair – 2x(4x2x0,14) + 2x(2x0,22) mm² - O.F.C. – KOMBY CABLE – Made In Italy

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Digital Audio Pairs Properties

Conductors Resistance	79,15 Ω/Km
Capacity Core/Core	50 pF/m
Capacity Core/Shield	95 pF/m
Impedance	110 Ω

Cat. 5e LAN Cables Properties

Max DC Conduktor Resistance	79,15 Ω/Km
Impedance	100 Ω

Other Cable Properties

Max Rated Voltage	49V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			