


Technical Datasheet

tasker® FSC6022 – 6x0,22 mm²

Flexible Multi Conductor Cable

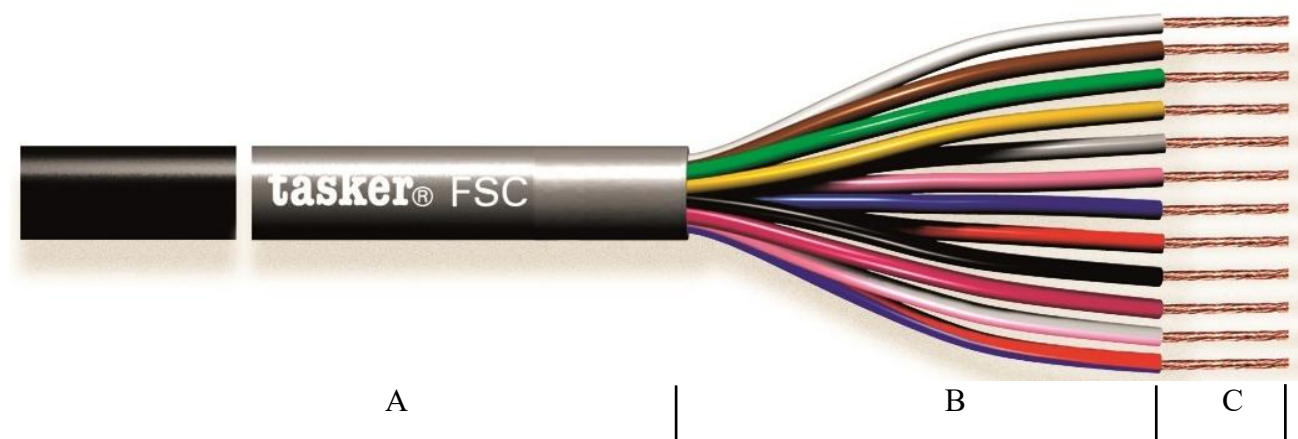

NOTE

CATEGORY

APPLICATIONS

The picture do not represent the real number of conductors.
Multi Conductor Cable (See Electronics Catalogue)
Wiring and Electronics.

- A:** Soft **Flame Retardant PVC** Sheath. Available in different color.
Outer Diam. Ø: 4,90 (±0,20) mm.
- B:** Cores Insulation with Soft **Flame Retardant PVC** sheath.
DIN 47100 Standards. Color Code: White, Brown, Green, Yellow,
Grey, Pink. Diam. Ø 1,10 (±0,20) mm.
- C:** Stranded O.F.C. Red Copper formation 7x0,20 mm.
Nom. Cross section 6x0,22 mm².

MARKING

CUSTOM

PRODUCTION

tasker® FSC 6022 6x0,22 mm² FLEX SHEATHED CABLE Firestop® Made in Italy
This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**,
with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. A / 06.07.16
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			