


MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## FirestoP® Technical Datasheet **tasker® C296 - 4x0,22 + 2x0,50mm<sup>2</sup> - Alarm Cable**

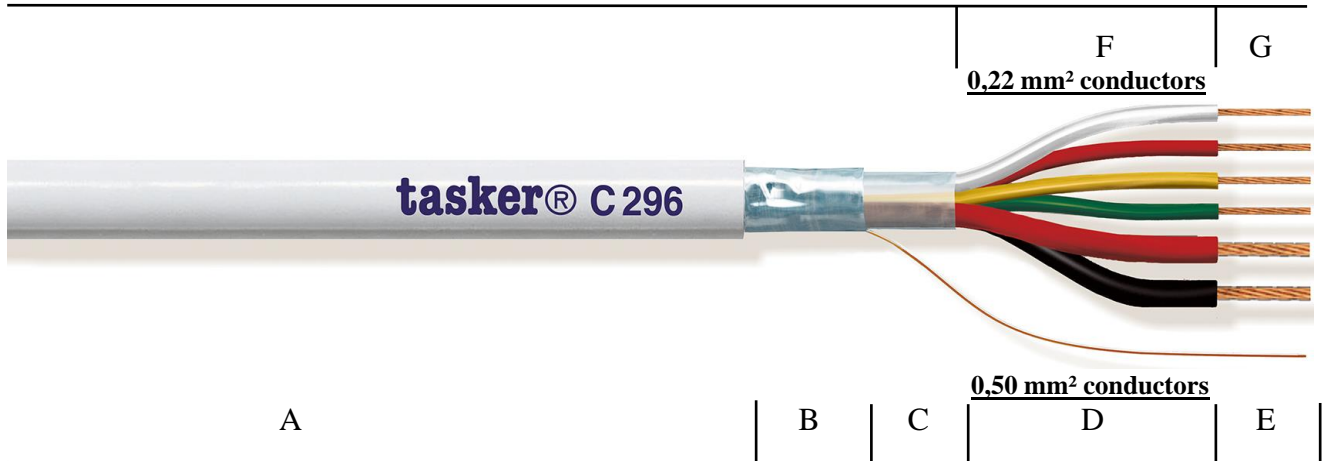

**CATEGORY** Alarm Cable (See Data Network Catalogue).

**APPLICATIONS** Alarm Systems and Electronics.

- A:** White Soft **Flame Retardant PVC** sheath. RAL 9003.  
Outer Diam. Ø 5,10 (±0,20) mm.
- B:** Shielding with Aluminum polyester tape covering 100%  
+ Drain Wire in O.F.C. red copper.
- C:** The six conductors are stranded together with polyester based tape.

### 2x0,50 mm<sup>2</sup> conductors

- D:** Insulation with PVC. Diam. Ø 1,50 (±0,20) mm. Core colors: Red, Black.
- E:** Stranded formation of 16x0,20 mm in O.F.C. Red Copper.  
Nom. Cross section 2x0,50 mm<sup>2</sup>.

### 4x 0,22 mm<sup>2</sup> conductors

- F:** Insulation with PVC. Diam. Ø 1,00 (±0,20) mm.  
Core colors: White, Red, Yellow and Green.
- G:** Stranded formation of 7x0,20 mm in O.F.C. Red Copper  
Nom. Cross section 4x0,22 mm<sup>2</sup>



MILAN S.r.l. a socio unico

**Head Office – Export department:** **Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa, 74 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059  
 F. +39 02 9039.4551 F. +39 02 9039.0049  
 www.taskercables.com www.tasker.it

**MARKING**

**tasker®** Shielded Alarm Systems cable - FirestoP® - Made in Italy

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H., PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Conductor 0,22 mm<sup>2</sup> Resistance</b>	79,15 Ω/Km
<b>Conductor 0,50 mm<sup>2</sup> Resistance</b>	38,00 Ω/Km
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-20/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS3 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. B / 26.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			