

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com


**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet

# ✓RoHS<sub>3</sub> tasker® TSK74 – 2x1,50 mm<sup>2</sup>

### Siliconic Flat Audio Divisible Cable for High Temperature

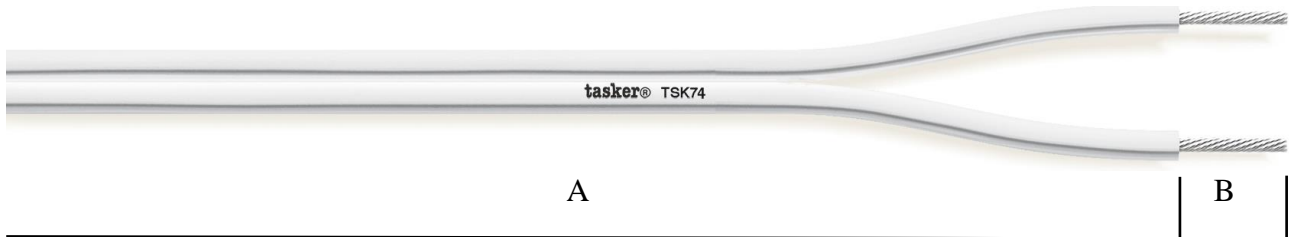

**CATEGORY** Flat Divisible Audio Cable  
**APPLICATIONS** Medical, water park, beauty center, harsh environment and temperature

**A:** Extra Soft White Silicon Rubber sheath.  
 Outer cable dimension 2,80x5,60 (±0,20) mm.

**B:** Both conductors in O.F.C. Tinned Copper.  
 Stranded formation 30x0,25 mm.  
 Nominal cross section 2x1,50 mm<sup>2</sup>.

**MARKING** tasker® TSK74 - 2x1,50 mm<sup>2</sup> - O.F.C. – Siliconic Audio Cable - Temp. Range - 60/+180°C – Made in Italy

**CUSTOM PRODUCTION** This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PVC** or **PUR**.

#### Coductors Properties

<b>Conductor Resistance</b>	13,70 Ω/Km
<b>Max Rated Voltage U<sub>0</sub>/U</b>	300/500 V
<b>Insulation Test Voltage</b>	2 KV x 5 min.
<b>Min. Bending Radius</b>	4xouter Ø
<b>Hardness of insulation</b>	70±5 shA
<b>Operative Temperature</b>	-60/+180°C

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS3 Compliant
<b>Impiego</b>	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. B / 16.05.19
	<input checked="" type="checkbox"/>	Outdoor	Esterno		<input checked="" type="checkbox"/>	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			