

MILAN S.r.l. a socio unico


Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet



# tasker® FSC24022 – 24x0,22 mm<sup>2</sup> Flexible Multi Conductor Cable

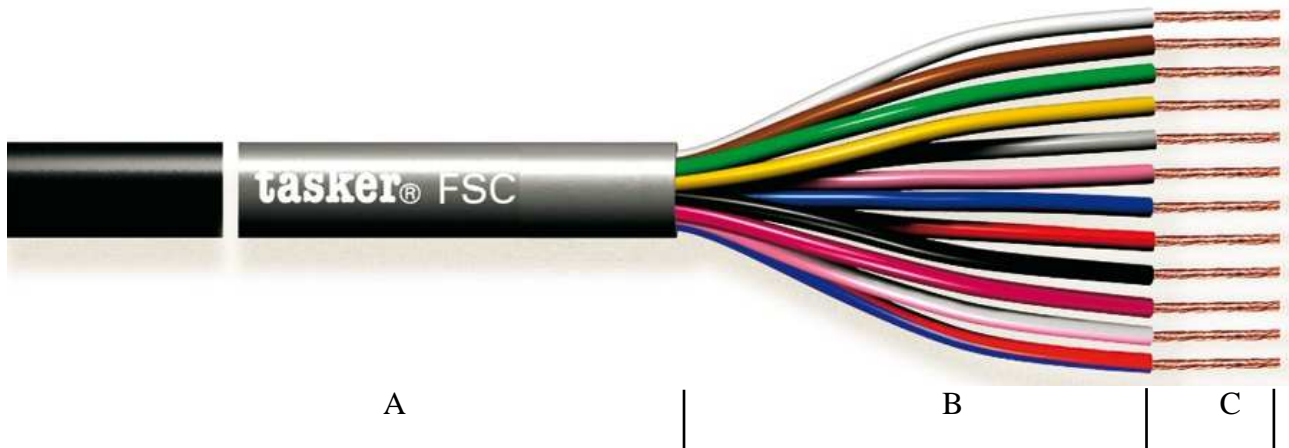

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture do not represent the real number of conductors.  
 Multi Conductor Cable ( See Electronics Catalogue)  
 Wiring and Electronics.

- A:** Soft **Flame Retardant PVC** sheath. Available in different colors.  
Outer cable diam Ø 8,80 (±0,20) mm.
- B:** Cores Insulation with Soft **Flame Retardant PVC**.  
DIN 47100 Standards. Color Code: White, Brown, Green, Yellow, Grey, Pink, Blue, Red, Black, Violet, Grey/Pink, Red/Blue, White/Green, Brown/Green, White/Yellow, Yellow/Brown, White/grey, Grey/Brown, White/Pink, Pink/Brown, White/Blue, Brown/Blue, White/Red, Brown/Red  
Core Diam. Ø 1,10 (±0,20) mm.
- C:** Stranded O.F.C. Red Copper formation 7x0,20 mm.  
Nom. Cross section 24x0,22 mm<sup>2</sup>.

**MARKING**  
**CUSTOM**  
**PRODUCTION**

**tasker® FSC 24022 24x0,22 mm<sup>2</sup> FLEX SHEATHED CABLE Firestop® Made Italy**  
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			