


Technical Datasheet

tasker® C266 – 2x2,00 mm²

Flexible Double Density Sheath Speaker Cable

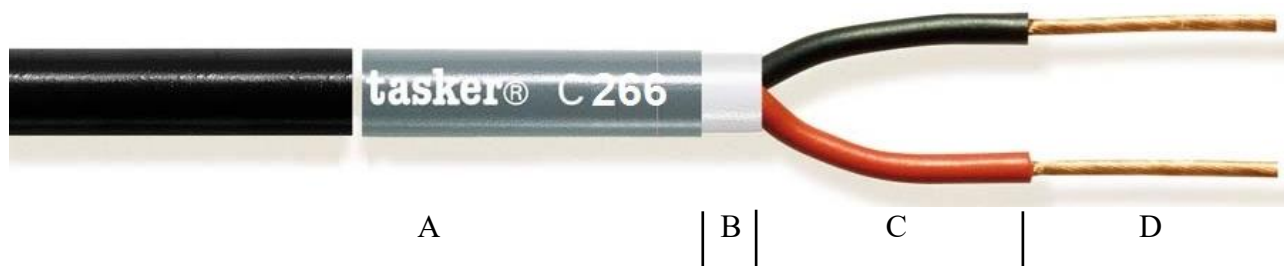

CATEGORY Flexible Speaker Cable (See Audio Catalogue)
APPLICATION Professional Loudspeakers and premade cables

- A:** First Soft **PVC** sheath, available in different color.
Outer cable Ø: 8,80 (±0,20) mm.
- B:** Second Soft **PVC** Sheath with different density.
- C:** Core Insulation in **PVC**, colored one Red and one Black.
Diam. Ø: 3,40 (±0,20) mm.
- D:** O.F.C. red copper formation 64x0,20 mm.
Nom. Cross section 2x2,00 mm².

MARKING **tasker® C266 - 2x2,00 mm² - O.F.C. - Loudspeakers Cable - Made In Italy**
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
PRODUCTION with or without Metallic Armor.

Cable Properties

Conductor Resistance	5 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. A / 16.06.16
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			