

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it


Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Technical Datasheet

tasker® C189 12x2x0,22 mm²

Shielded Twisted Pair Cable

✓
RoHS₂
2002/95/EC
2011/65/UE

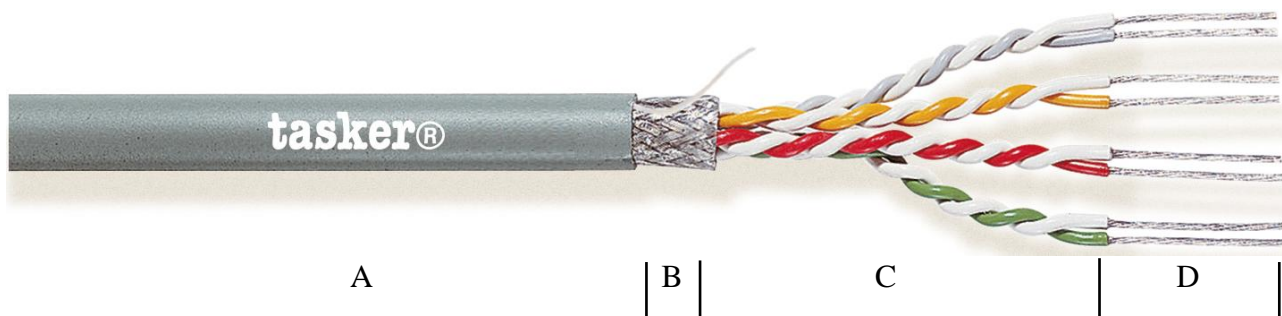

NOTE
CATEGORY
APPLICATIONS

The picture does not represent the real number of pairs.
S.T.P. Cable (See Data Network Catalogue)
Electronic and Data Transmission

- A:** Grey **PVC** Sheath.
Outer cable Ø: 10,50 (±0,20) mm.
- B:** Shielding in O.F.C. tinned copper Braid, covering 85%
- C:** The cores are stranded in a pair with 30 twist/m. and insulation with **PVC**. Diam. Ø 1,20 (±0,20) mm.
Pair color code: White/ Grey, White/ Yellow, White/Red, White/Green, White/Blue, White/Brown, White/Black, Yellow/Grey, Yellow/Red, Yellow/Green, Yellow/Blue, Yellow/Brown.
- D:** O.F.C. tinned copper formation 7x0,20 mm.
Nom. Cross section 12x2x0,22 mm²

MARKING

tasker® C189 12x2x0,22 mm² DATA TRASMISSION TWISTED PAIR SHELDED CABLE MADE IN ITALY

CUSTOM
PRODUCTION

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	90 pF/m
Capacity Core/Shield	140 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			