


Technical Datasheet **tasker® C324 – 24x2x0,22 mm²** Individually Shielded Multi Pair Cable

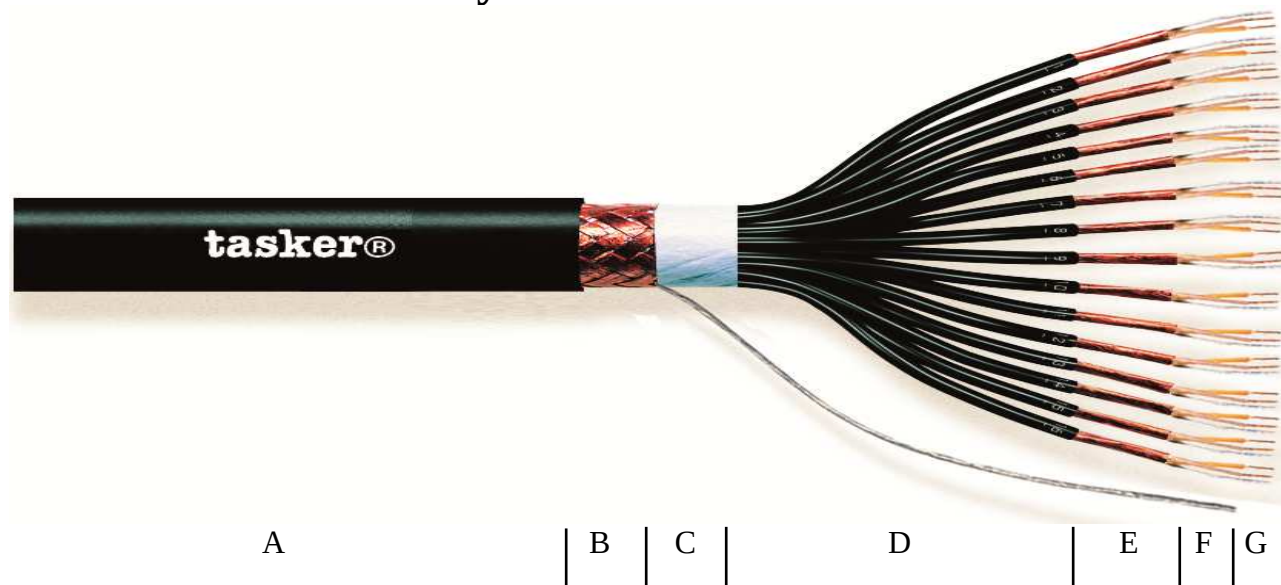

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors
 Multipair Audio Cable (See Audio Catalogue)
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** sheath.
 Outer cable dimension Ø 20,00 (±0,20) mm.
- B:** Total Shielding in O.F.C. red copper Braid covering 85%.
 + Tinned Copper Drain Wire.
- C:** Total taping in not woven polyester tape.
- D:** Inner sheaths in PVC, Black and numbered. Diam. Ø 3,00 (±0,20) mm.
- E:** Shielding on each single pair in O.F.C. red copper Spiral covering 100%.
- F:** Core Insulation with solid PE, colored one Transparent and one Yellow.
 Diam. Ø 1,00 (±0,20) mm.
- G:** O.F.C. red copper formation 28x0,10 mm.
 Nom. Cross section 24x2x0,22 mm².



MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione

Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it

MARKING

tasker® C324 24x2x0,22mm² PROFESSIONAL SHIELDED MULTIPAIR CABLE FOR AUDIO MIXER MADE IN ITALY

**CUSTOM
PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/mt
Capacity Core/Shield	160 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			