

MILAN S.r.l. a socio unico


Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet

# tasker® C272 – 2x2x0,08 mm<sup>2</sup>

## Extra Flex Multipair Audio Cable

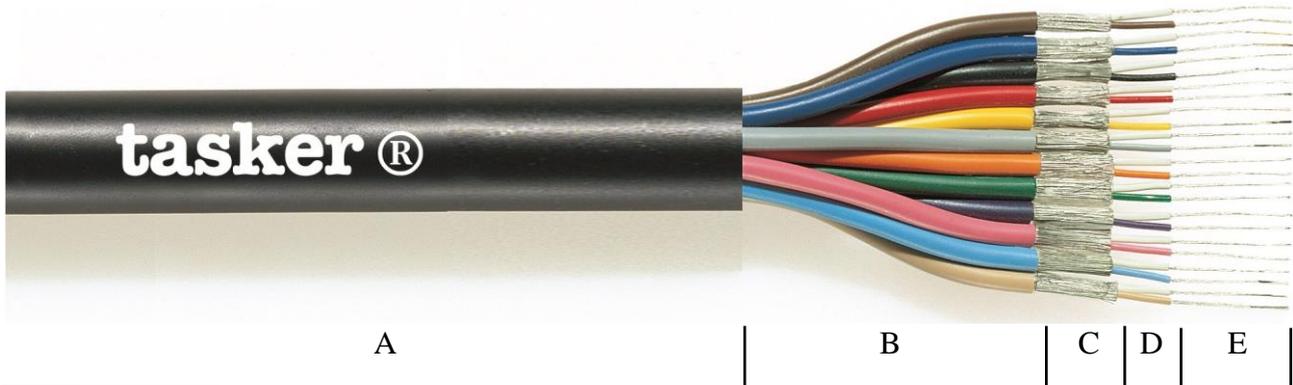

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture don't represent the real number of conductors.  
 Multipair Audio Cable (See Audio Catalogue)  
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** Sheath. Outer cable Ø: 8,20 (±0,20) mm.
- B:** The single pair are isolated with **PVC**. Nom. Diam. Ø 2,90 (±0,20) mm.  
Color Code: Brown, Blue.
- C:** The single pair are shielded with O.F.C. tinned copper spiral, covering 100%
- D:** The single cores are insulated with **PVC**.  
Nom. Diam. Ø 0,90 (±0,20) mm.  
Color Code: White-Brown, White-Blue.
- E:** O.F.C. tinned copper formation 12x0,10 mm  
Nom. Cross section 2x2x0,08 mm<sup>2</sup>.

**MARKING**  
**CUSTOM**  
**PRODUCTION**

**tasker® C272 2x2x0,08 – O.F.C. - MULTIPAIR AUDIO CABLE**  
 – Made in Italy  
 This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**,  
 with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	203 Ω/Km
<b>Capacity Core/Core</b>	170 pF/m
<b>Capacity Core/Shield</b>	200 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			