


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet
FirestoP® tasker® TSK1073
3x RG174 (50Ω) + 3x Control Cable

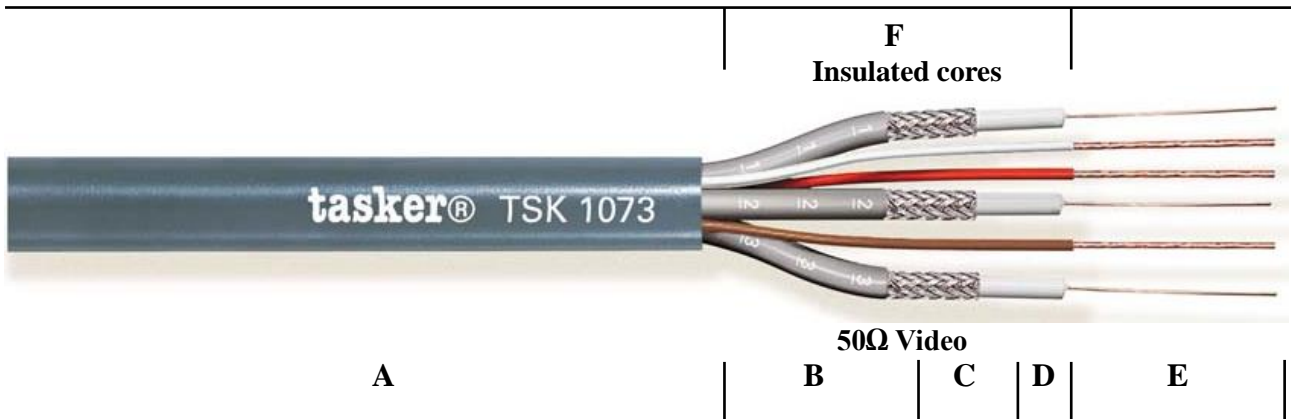

CATEGORY Komby Cable 50Ω
APPLICATIONS Digital Cameras, Video surveillance.

A: Grey **Flame Retardant Sheath**.
 Outer cable diam. Ø 8,10 (± 0,20) mm.

RG174 (50 ohm):

- B:** Grey PVC Sheaths, numbered from 1 to 3.
Diam. Ø: 2,80 (± 0,20) mm.
- C:** Spiral Shielding in O.F.C. tinned copper covering 98%.
- D:** Transparent compact PE Insulation. Diam. Ø 1,50 (± 0,20) mm.
- E:** Stranded CW formation 7x0,16 mm.
Nom. Cross section 3x0,14 mm².

Insulated cores:

- F:** Flame Retardant PVC sheath. Diam. 1,20 (± 0.20) mm.
Colored White, Red, Brown.
- G:** Stranded formation in O.F.C. Red Copper 7x0,20 mm.
Nom. Cross Section 3x0,22 mm².

MARKING **tasker®** TSK 1073 3x50 Ohm + 3x0,22 mm² Special Mil. coax
 Cable FirestoP® MADE IN ITALY

CUSTOM PRODUCTION This product may be custom produced also with **L.S.Z.H.** polymer, **PE** or **PUR** sheath, with or without Metallic Armor.

MILAN S.r.l. a socio unico

Head Office – Export department: **Ufficio Commerciale e Centro Distribuzione**
 Viale Europa, 74 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059
 F. +39 02 9039.4551 F. +39 02 9039.0049
 www.taskercables.com www.tasker.it

General properties

0,22 mm² Conductors	75,15 Ω/Km
Coax Conductor Resistance	290 Ω/Km
Impedence	50 Ω
Velocity of Propagation	66%
Capacity Core/Shield	100 pF/m
Operative Temperature	-20/+70°C

Attenuation dB/100 m

50 MHz	17,5
100 MHz	25,8
200 MHz	38,2
400 MHz	54,9
800 MHz	77,0
1000 MHz	87,5

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 15.02.18
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			10% measurement tolerance, unless otherwise indicated.