

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione

Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.


Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it



Technical Datasheet

tasker® C416 – 16x2x0,22 mm²

Single Shielded Multipair Audio Cable

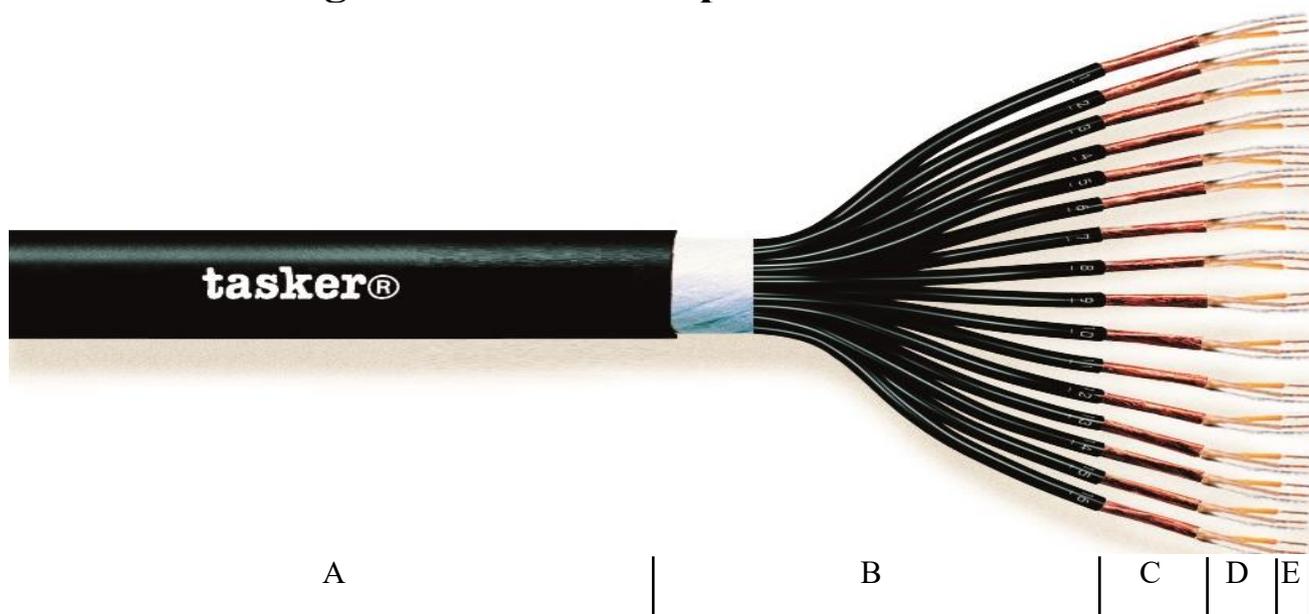

CATEGORY Multipair Audio Cable (See Audio Catalogue)
APPLICATIONS Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black PVC Sheath.
Outer cable Diam. Ø: 17,00 (±0,20) mm.
- B:** The single pair are isolated with black PVC, numbered from one to the number of elements and wrapped together with not weaved tape.
Diam. Ø 3,00 (±0,20) mm.
- C:** The single pair are shielded with spiral in O.F.C. red copper, covering 100% + tinned copper Drain Wire and wrapped with polyester tape.
- D:** The single cores are insulated with Solid PE, colored one Yellow and one Transparent. Diam. Ø 1,00 (±0,20) mm.
- E:** O.F.C. red copper formation 28x0,10 mm.
Nom. Cross section 16x2x0,22 mm².

MARKING **tasker®** C416 - 16x2x0,22mm² - Professional Multipair Cable for Audio Mixer – Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PUR, with or without Metallic Armor.

MILAN S.r.l. a socio Unico
Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 RE.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/m
Capacity Core/Shield	160 pF/m
Velocity of Propagation	66%
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.02.26
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			