

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C267 – 2x3,00 mm²

Double Density Sheath Flexible Speaker Cable

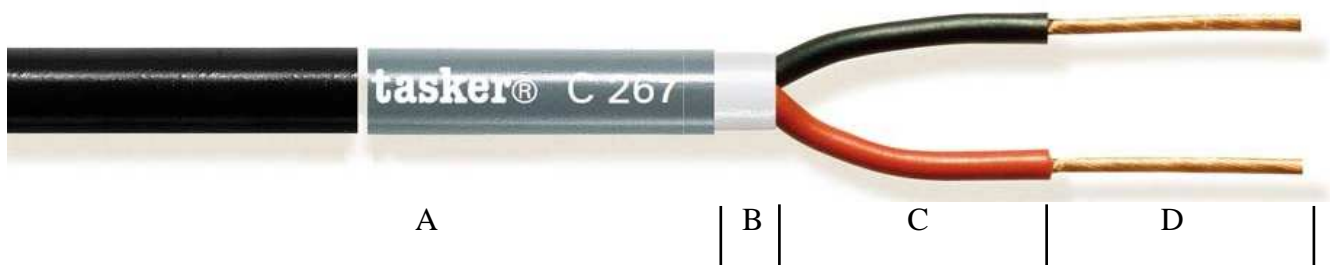

CATEGORY Flexible Speaker Cable (See Audio Catalogue)
APPLICATIONS Professional Loudspeakers and premade cables

- A:** First Soft **PVC** Sheath. Available in different color .
Outer cable Diam. Ø 9,80 (±0,20) mm.
- B:** Second Soft **PVC** Sheath with different density.
- C:** Core Insulation with a Third **PVC** Sheath, colored one Red and one Black.
Diam. Ø 3,90 mm (±0,20) mm.
- D:** O.F.C. red copper formation 96x0,20 mm
Nom. Cross section 2x3,00 mm².

MARKING tasker® C276 2x2,50 – 13 AWG O.F.C. Loudspeakers Cable - Made In Italy
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
PRODUCTION with or without Metallic Armor.

Cable Properties

Conductor Resistance	5,70 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			