

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C190 13x2x0,22 mm² ✓ RoHS₂ Shielded Twisted Pair Cable

2002/95/EC
2011/65/UE

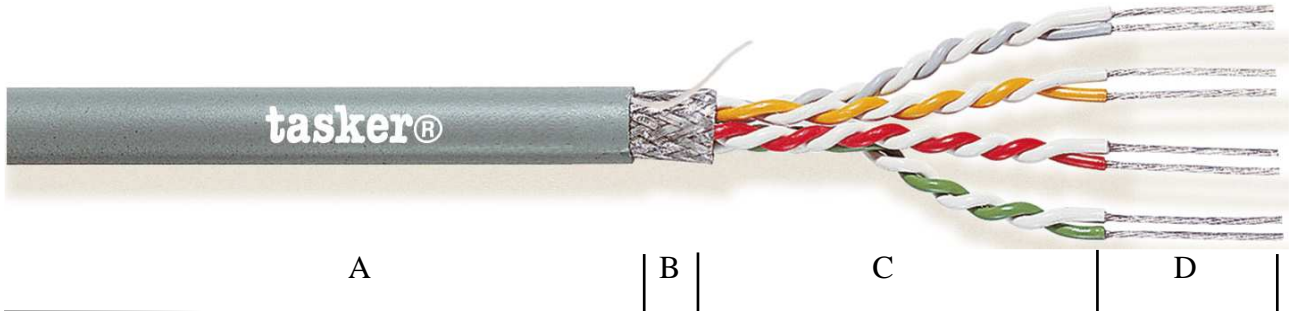

NOTE
CATEGORY
APPLICATIONS

The picture does not represent the real number of pairs.
 S.T.P. Cable (See Data Network Catalogue)
 Electronic and Data Transmission

- A:** Grey Soft **PVC** Sheath.
Outer cable Ø: 11,00 (±0,20) mm.
- B:** Shielding in O.F.C. tinned copper Braid, covering 85%
- C:** The cores are stranded in a pairs with 30 twist/m. and insulation with **PVC**. Diam. Ø 1,20 (±0,20) mm.
Pair color code: White/ Grey, White/ Yellow, White/Red, White/Green, White/Blue, White/Brown, White/Black, Yellow/Grey, Yellow/Red, Yellow/Green, Yellow/Blue, Yellow/Brown, Yellow/Black.
- D :** O.F.C. tinned copper formation 7x0,20 mm.
Nom. Cross section 13x2x0,22 mm²

MARKING

tasker® C190 13x2x0,22 mm² DATA TRASMISSION TWISTED PAIR SHELDED CABLE MADE IN ITALY

CUSTOM PRODUCTION

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	90 pF/mt
Capacity Core/Shield	140 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego	X	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.17