


Technical Datasheet

tasker® C735 L.S.Z.H. – Komby LAN Cable

2xCat.6 F/F.T.P. LAN + POWER

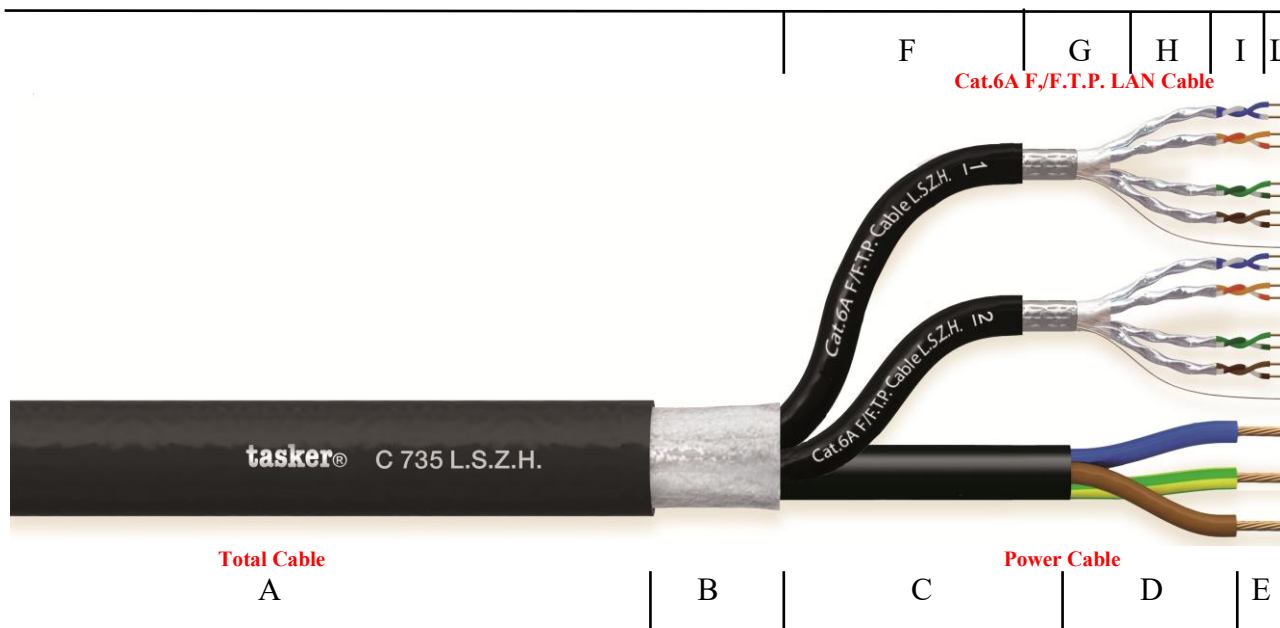

CATEGORY Komby LAN Cable (See Data Network Catalogue)
APPLICATIONS Broadcast and LAN installation

- A:** Black L.S.Z.H. Sheath – Fire Resistant and Halogen Free.
Outer cable Dim. Ø 20,00 (±0,20) mm.
- B:** The inner elements are stranded together with polyester-based tape.

3x2,50 mm² Power Cable

- C:** Black L.S.Z.H. Inner sheath – Fire Resistant and Halogen Free.
Diam. Ø 8,20 (±0,20) mm.
- D:** Conductors insulation with L.S.Z.H. Sheaths – Fire Resistant and Halogen Free. Diam. Ø 3,40 (±0,20) mm.
Color Code: Blue, Brown and Yellow/Green.
- E:** Stranded formation of 48x0,25 mm in O.F.C. Red Copper.
Nom. Cross section 3x2,50 mm².

2x(4x2x0,25) mm² Cat.6A F/F.T.P. LAN Cable

- F:** Black L.S.Z.H. Inner sheaths – Fire Resistant and Halogen Free.
Numbered 1 and 2 - Diam. Ø 7,50 (±0,20) mm.

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

- G:** Total shielding with Aluminum Foil tape covering 100%.
+ Drain Wire and total taping of the pairs.
- H:** The four pairs are individually shielded with aluminum foil tape covering 100%.
- I:** Conductors' insulation in PEE, stranded to pairs.
Diam. Ø 1,50 (±0,10) mm. Color Code: White/Blue, White/Orange, White/Green, White/Brown.
- L:** O.F.C. Red Copper stiff wire formation of 1x0,57 mm.
Nom. Cross section 4x2x0,25 mm².

MARKING

tasker® C735 L.S.Z.H. – 2x Cat. 6A F./F.T.P.+ 3x2,50 mm² - O.F.C.–
KOMBY CABLE -10 GBIT Ethernet - Made in Italy

CUSTOM
PRODUCTION

This product may be custom produced also in **PVC** polymer, **PE**, **PUR**, with or without Metallic Armor.

Cable Properties

Power Conductors Resistance	6,41 Ω/Km
Cat. 6A Conductors Resistance	75,85 Ω/Km
Max Rated Voltage	49V
Operative Temperature	-30/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 26.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			