

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet

# tasker® C215 – 8x0,25 mm<sup>2</sup> - LiYCY Cable

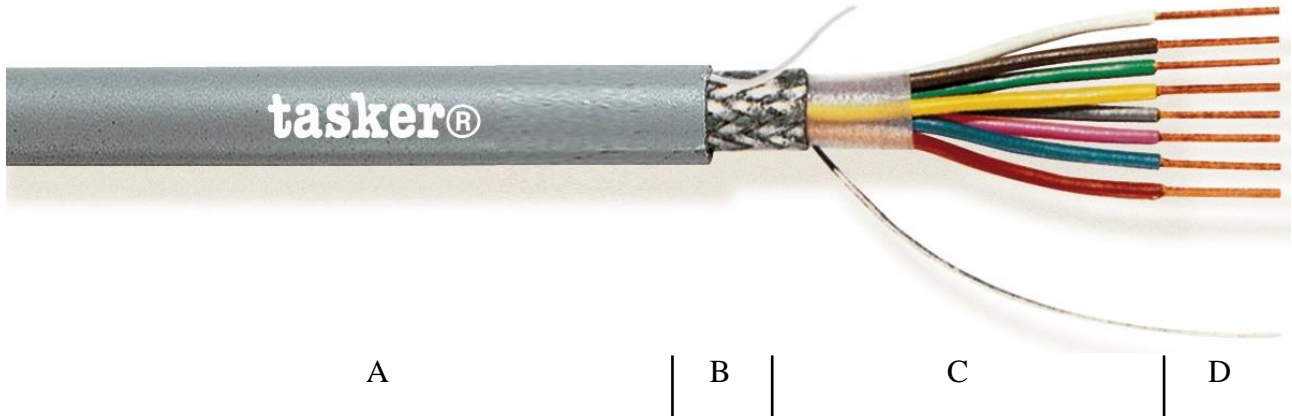

**CATEGORY** Shielded Cable (See Data Network Catalogue)  
**APPLICATIONS** Data transmission and electronics.

- A:** Grey Soft **PVC** Sheath.  
Outer cable Ø: 7,40 (±0,20) mm.
- B:** Braided Shielding in O.F.C. Tinned Copper, covering 85% + Drain Wire.
- C:** Cores Insulation with Soft **PVC**– DIN 47100 Standards.  
Color Code: White, Brown, Green, Yellow, Grey, Pink, Blue, Red.  
Diam. Ø 1,30 (±0,20) mm. Stranded with waste filler between conductors and wrapped with Mylar Tape.
- D:** Stranded O.F.C. Red Copper formation 14x0,15 mm.  
Nom. Cross section 8x0,25 mm<sup>2</sup>.

**MARKING** **tasker®** C215 LiYCY 8x0,25 – 23 AWG Low Voltage Computer Cable made in Italy

**CUSTOM PRODUCTION** This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	75,85 Ω/Km
<b>Capacity Core/Core</b>	80 pF/mt
<b>Capacity Core/Shield</b>	150 pF/mt
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS2 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. A / 08.07.2016
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			