

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet ✓ **RoHS₃**

FirestoP® tasker® C128 PUR – 2x0,35 mm² Halogen Free

Low Capacity Balanced Microphone Cable – Outdoor Use

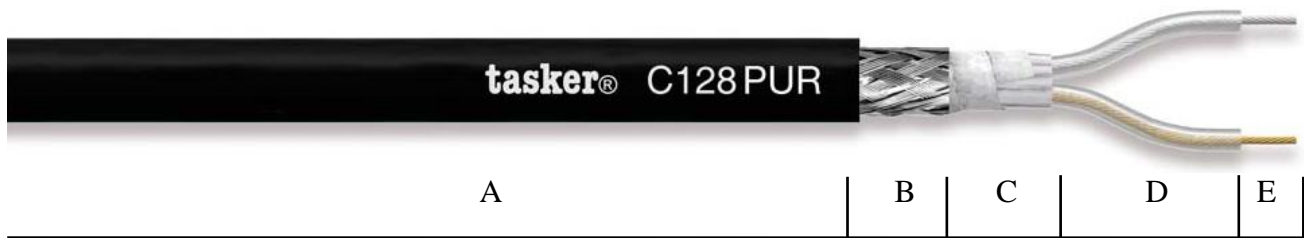

CATEGORY Balanced Microphone Cable (See Audio Catalogue)
APPLICATIONS Premade Audio Cables and Microphones.

- A:** Black Polyurethane (**PUR**) Sheath. Outer Diam. Ø 6,00 (±0,20) mm. Flame Retardant, Halogen Free and UV, Chemical and Oil Resistant.
- B:** Braided Shielding O.F.C. tinned copper covering 90%.
- C:** The cores are stranded in a pair with waste filler between conductors and wrapped with not woven polyester based tape.
- D:** Transparent Cores Insulation with compact PE. Diam. Ø 1,70 (±0,20) mm.
- E:** One conductor in O.F.C. red copper and one in O.F.C. tinned copper Formation 11x0,20 mm. Nom. Cross section 2x0,35 mm².

MARKING **tasker® C128 PUR 2x0,35 - 22 AWG PUR + HF + FirestoP® OUTDOOR USE**
 Microphone Cable Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PVC,** or Metallic Armored.

Cable Properties

Conductor Resistance	58 Ω/Km
Capacity Core/Core	55 pF/mt
Capacity Core/Shield	92 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-40/+80°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
	X	Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			