


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet **Firestop®** **tasker® TSK1065 Special Video Cable 75Ω**

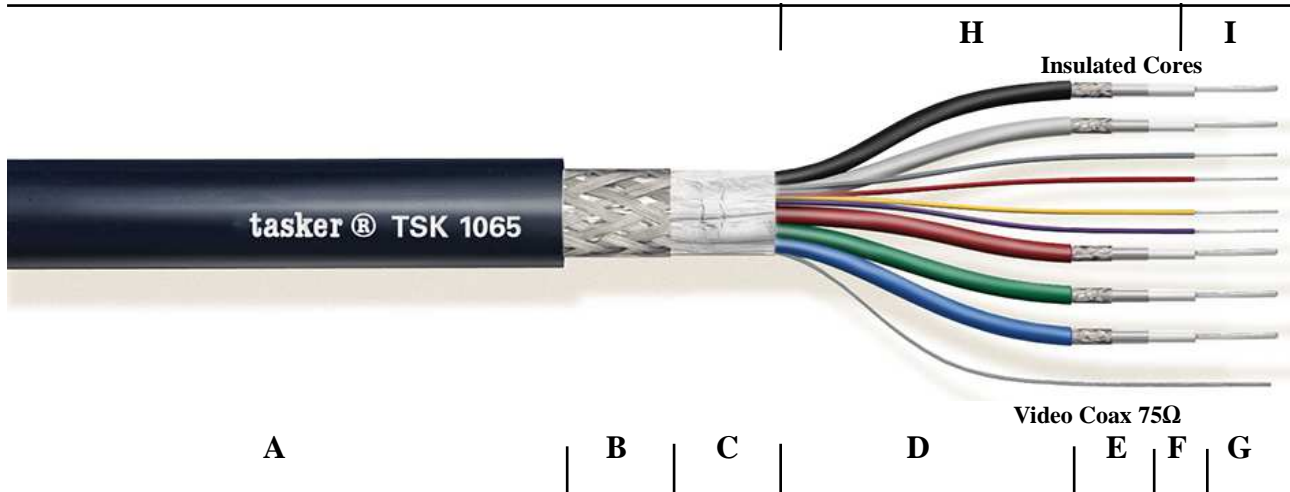

CATEGORY Special Video Cable 75Ω (See Video Catalogue)
APPLICATIONS R.G.B. Video and S-VGA / XGA.

- A:** Night Blue Soft **Flame Retardant PVC**.
Outer Diam. Ø 10,30 (±0,20) mm.
- B:** O.F.C. Tinned Copper Braid Shielding, covering 80% + drain Wire.
- C:** Aluminum foil tape covering 100%.

5x Video Coax 75Ω:

- D:** Sheath in **PVC**. Colored: Red, Blue, Green, Black, White.
Diam. Ø 2,90 (±0,20) mm.
- E:** **First shielding with** O.F.C. tinned copper braid, covering 90%.
+ Drain Wire, second with Aluminum foil tape covering 100%.
- F:** Insulated in PPE. Diam. Ø 1,70 (±0,20) mm.
- G:** Stranded in O.F.C. tinned copper formation 7x0,15 mm.
Nom. section 5x0,12 mm² (75Ω).

4x Insulated Cores:

- H:** Sheath in **PVC**. Colored: Grey, Red, Yellow, Violet.
Diam. Ø 1,20 (±0,20) mm.
- E:** Stranded in O.F.C. tinned copper formation 7x0,20 mm.
Nom. section 4x0,22 mm².

MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione

Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it

MARKING

tasker® TSK1065 – 5x75Ω + 4x0,22 mm² professional Shielded high definition video cable

CUSTOM PRODUCTION

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

General Properties

Coax Conductors Resistance	140 Ω/Km
Impedence	75 Ω
Velocity of Propagation	66 %
Capacity Core/Shield	65 pF/m
Free Conductors Resistance	79,15 Ω/Km
Operative Temperature	-20/+70°C

Attenuation dB/100 m.

50 MHz	18,50
100 MHz	27,50
200 MHz	40,30
400 MHz	59,50
800 MHz	86,50
1000 MHz	101,50

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			