

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet

# tasker® C266 – 2x2,00 mm<sup>2</sup>

### Flexible Double Density Sheath Speaker Cable

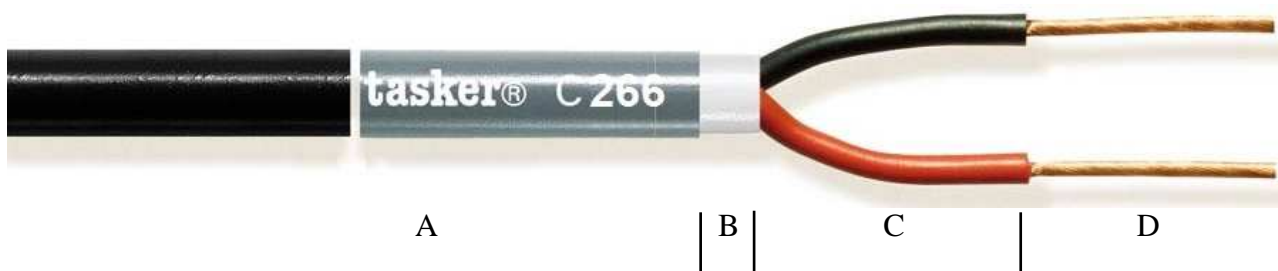

**CATEGORY** Flexible Speaker Cable (See Audio Catalogue)  
**APPLICATION** Professional Loudspeakers and premade cables

- A:** First Soft **PVC** sheath, available in different color.  
Outer cable Ø: 8,80 (±0,10) mm.
- B:** Second Soft **PVC** Sheath with different density.
- C:** Core Insulation in **PVC**, colored one Red and one Black.  
Diam. Ø: 3,40 (±0,10) mm.
- D:** O.F.C. red copper formation 64x0,20 mm.  
Nom. Cross section 2x2,00 mm<sup>2</sup>.

**MARKING** **tasker® C266 2x2,00 – 14 AWG O.F.C. Speaker Cable Loudspeakers**  
 Cable - Made In Italy

**CUSTOM PRODUCTION** This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

#### Cable Properties

<b>Conductor Resistance</b>	5 Ω/Km
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Flexible Limited	Flessibilità limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.06.16
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			