

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C276 – 2x2,50 mm²

Flexible Double Density Sheath Speaker Cable

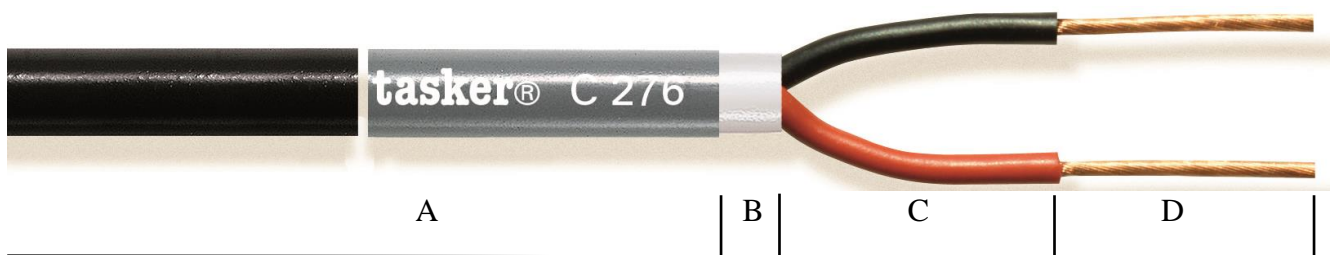

CATEGORY Flexible Speaker Cable (See Audio Catalogue)
APPLICATIONS Professional Loudspeakers and premade cables

- A:** First Soft **PVC** sheath - available in different color.
Outer cable Diam. Ø 9,00 (±0,20) mm.
- B:** Second Soft **PVC** Sheath with different density.
- C:** Core Insulation with a Third PVC Sheath, colored one Red and one Black.
Diam. Ø 3,50 (±0,20) mm.
- D:** O.F.C. red copper formation 80x0,20 mm.
Nom. Cross section 2x2,50 mm².

MARKING **tasker®** C276 2x2,50 mm² – 14 AWG O.F.C. Loudspeaker Cable
 - Made In Italy

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	6,41 Ω/Km
Max Rated Voltage	49 V
Test Voltage	300/500 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 20.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			