

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® TSK808 – 8x2x0,14 mm² RoHS₃

Digital Audio Multipair Cable 110 Ohm AES/EBU

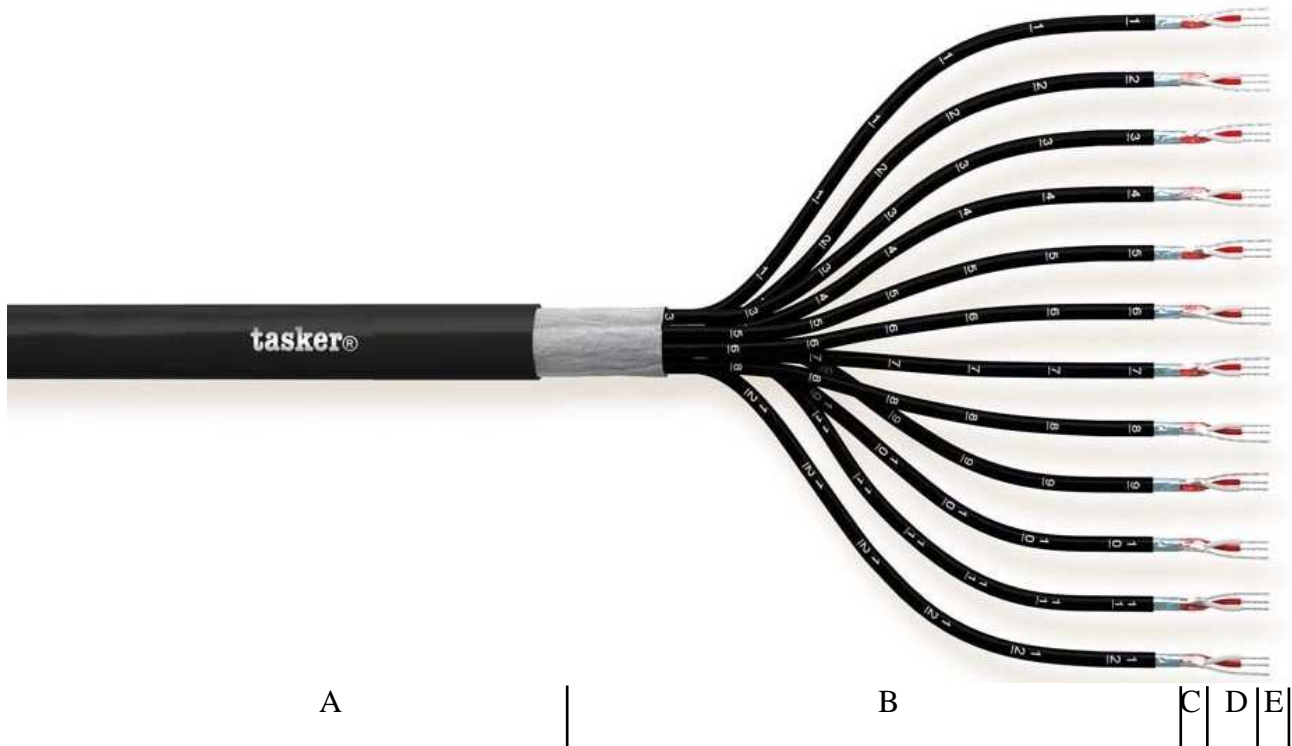

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors
 Digital Multipair Audio Cable (See Audio Catalogue)
 Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Soft Black **PVC** Sheath.
Outer cable Ø: 12,90 (±0,10) mm.
- B:** The single pairs are isolated with black **PVC**, numbered from one to the number of elements and wrapped together with polyester base tape.
Diam. Ø 3,20 (±0,10) mm.
- C:** The single pair are shielded with aluminum tape covering 100% + tinned copper Drain Wire.
- D:** The single cores are insulated with **foam PE**, colored one white and one red, and wrapped with not weaved polyester base tape.
Diam. Ø 1,20 (±0,10) mm.

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

E: O.F.C. tinned copper formation 18x0,10 mm.
 Nom. Cross section 8x2x0,14 mm².

MARKING

tasker® TSK 808 8x2x0,14 mm² - EXTRA FLEX DIGITAL AUDIO MULTIPAIR CABLE - MADE IN ITALY

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

| | |
|------------------------------|-------------|
| Conductor Resistance | 138,00 Ω/Km |
| Capacity Core/Core | 50 pF/mt |
| Capacity Core/Shield | 100 pF/mt |
| Impedance | 110 Ω |
| Max Rated Voltage | 49 V |
| Operative Temperature | -15/+70°C |

| | | | | | | | | | | |
|----------------|----------|-----------------------|-------------------|---------------------|----------|----------------------|------------------|---------------------|----------|-------------------|
| USE | X | Indoor | Interno Edificio | INSTALLATION | X | Fixed | Fissa | INFORMATION | X | RoHS3 Compliant |
| Impiego | | Outdoor Limited | Esterno Limitato | Posa | X | Restricted Mobile | Mobile Limitata | Informazioni | X | Ver. B / 16.05.19 |
| | | Outdoor | Esterno | | | Mobile | Mobile | | | |
| | | Outdoor Direct Burial | Esterno Interrato | | | Mobile in Drag Chain | Mobile in Catena | | | |