

tasker Since 1977

the excellence of Made in Italy

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com


Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it



Technical Datasheet

tasker® TSK912 CPR Cca – 12x2x0,28 mm² Fix Installation Digital Audio Multipair Cable

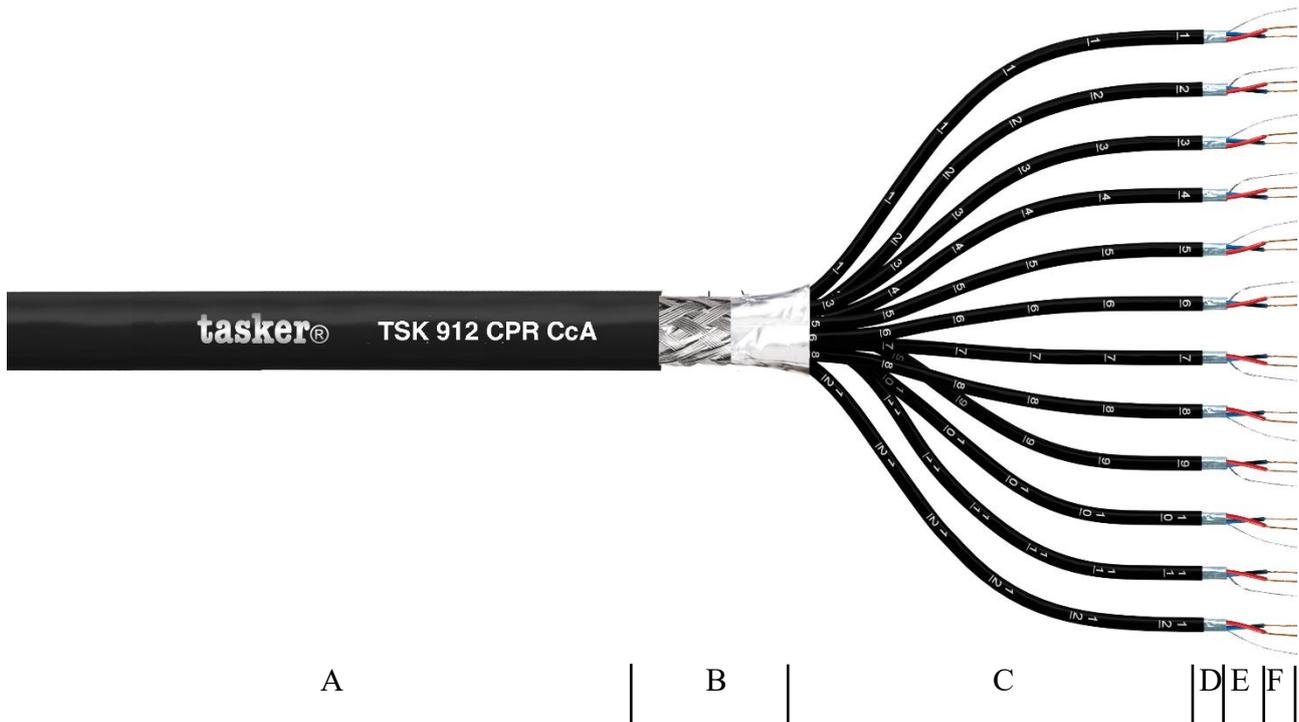

CATEGORY Digital Multipair Audio Cable (See News brochure)
APPLICATIONS Audio Mixers and Benches

- A:** Black **L.S.Z.H.** polymer grade M1. Flame Retardant and halogen Free. Outer cable Ø: 20,00 (±0,20) mm.
- B:** Total shielding with aluminum foil and tinned copper braid covering 80%.
- C:** The single pairs are isolated with black **L.S.Z.H.**, numbered from one to the number of elements and wrapped with proper fillers. Diam. Ø 3,80 (±0,20) mm.
- D:** The single pair are shielded with aluminum tape covering 100% + tinned copper drain wire.
- E:** The single cores are insulated with **foam PE**, colored one blue and one red. Diam. Ø 1,50 (±0,20) mm.
- F:** O.F.C. red copper formation 1x0,60 mm (23/1 AWG). Nom. Cross section 12x2x0,28 mm².

MARKING

tasker® TSK912 CPR Cca - 12x2x0,28 mm² - Digital Audio Multipair cable
AES/EBU 110Ω – CPR – Cca – s2–d2-a2 – FirestoP® - Halogen Free – Made in Italy

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Cable Properties

Conductor Resistance	70 Ω/Km	Impedance	110 Ω
Capacity Core/Core	45 pF/m	Max Rated Voltage	49 V
Capacity Core/Shield	100 pF/m	Test Voltage	1500 V
Operative Temperature	-20/+80°C	Min. Bending Radius (Fixed)	7 x O.D.

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS2 Compliant
Impiego	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	Posa		Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. B / 1.1.12.24
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			