




Technical Datasheet

tasker® C862 PVC – 2x2x0,35 mm²

DMX512 110 Ohm Cable

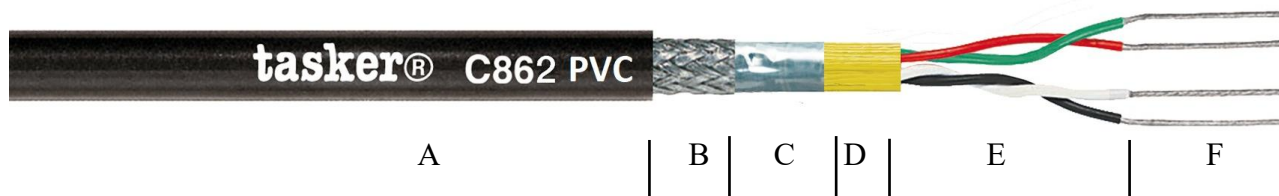

CATEGORY Special Production DMX Cable
APPLICATIONS DMX control and lights

- A:** Black PVC tubular sheath.
Outer Diam. Ø 7,50 (±0,20) mm.
- B:** First Shielding in O.F.C. tinned copper Braid covering 85%
- C:** Second Shielding with aluminum foil tape covering 100%
- D:** Kevlar fiber filler between conductors.
- E:** Core Insulation in Foam PE.
Pairs Color code: Red-Green, White-Black.
Core Diam. Ø 1,50 (±0,20) mm.
- F:** O.F.C. tinned copper stranded formation 19x0,15 mm.
Nominal cross section 2x2x0,35 mm².

MARKING **tasker®** C862 PVC - 2x2x0,35 mm² - O.F.C. ProFLEX Digital 110 Ω DMX
Cable - Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
or Metallic Armored.

Cable Properties

Conductor Resistance	60,00 Ω/Km
Impedance	110 Ω
Capacitance	45 pF/m
Test Voltage	1500 V/1 Min.
Max Rated Voltage	49 V
Min. Bending Radius	15 x O.D.
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 06.10.2025
		Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			