

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® T30 – 2x0,22 mm² Balanced Microphone Cable

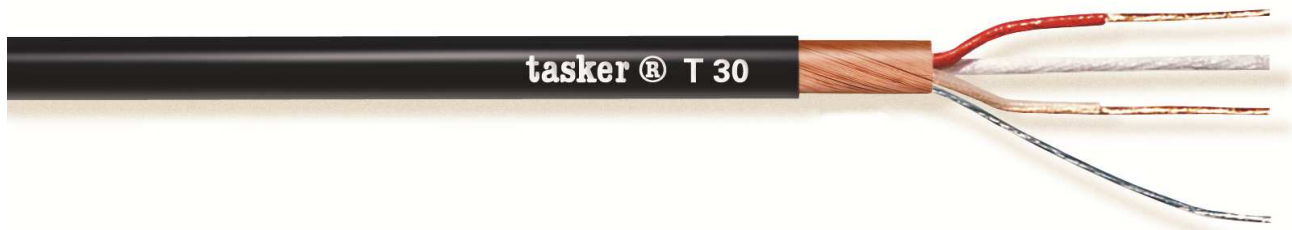

A		B		C		D
---	--	---	--	---	--	---

CATEGORY Balanced Microphone Cable (See Audio Catalogue)

APPLICATIONS Premade Audio Cables and Audio Multiline.

- A:** Soft Black PVC Sheath. Outer cable Diam. Ø 5,80 (±0,10) mm.
- B:** Shielding O.F.C. red copper Spiral covering 100%.
+ Tinned Copper Drain Wire.
- C:** The cores will be stranded in a pair with textile waste filler between Conductors. Core Insulation with a compact XLPE, colored one Red and one Transparent. Diam. Ø 1,10 (±0,10) mm.
- D:** O.F.C. red copper, formation 28x0,10 mm.
Nom. Cross section 2x0,22 mm².

MARKING tasker® T30 2x0,22 mm² O.F.C. Extraflex Microphone Cable Made in Italy
CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PUR, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79 Ω/Km
Capacity Core/Core	75 pF/mt
Capacity Core/Shield	160 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			