

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® C530 NETBUS Cable - LonWorks™

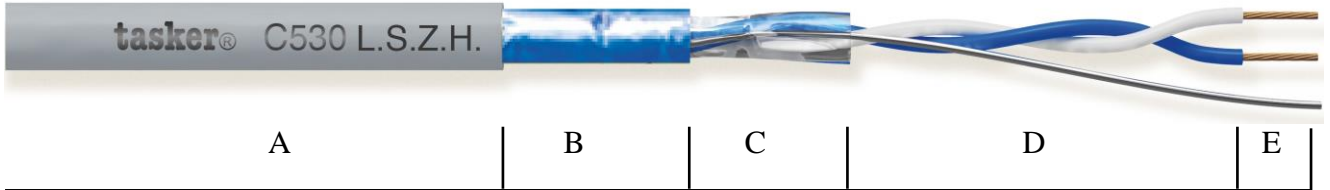

CATEGORY Shielded Cable for NETBUS networks (See Data Network Catalogue)
APPLICATIONS Electronics and data transmission

- A:** Grey **L.S.Z.H.** sheath. Flame Retardant and Halogen Free.
Outer Diam. Ø: 5,00 (±0,20) mm.
- B:** Shielding in Aluminum/PET tape, covering 100% + Drain Wire.
- C:** The cores are stranded in a pair with polyester tape and synthetic fillers.
- D:** Core insulated in Foam PE colored one blue and one white.
Diam. Ø 1,65 (±0,20) mm.
- E:** Stiff Wire O.F.C. Red Copper, formation 1x0,64 mm.
Nom. Cross section 1x2x0,33 mm²

MARKING **tasker®** C530 - 2x22 AWG - O.F.C. – Netbus Lonworks Cable - Firestop®
 L.S.Z.H. – Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	57 Ω/Km
Capacity Core/Core	45 pF/m
Impedance	100 Ω ± 5%
Max Rated Voltage	49 V
Operative Temperature	-30/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. B / 16.05.24
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			