

MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74  
20090 Cusago (MI) Italy  
T. +39 02 9039.4556-4158  
F. +39 02 9039.4551  
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione


Viale Europa 72 Strada F12  
20090 Cusago (MI) Italy  
T. +39 02 9039.0037-0059  
F. +39 02 9039.0049  
www.tasker.it



## Technical Datasheet

# tasker® C304 – 4x2x0,22 mm<sup>2</sup>

### Individually Shielded Multipair Cable

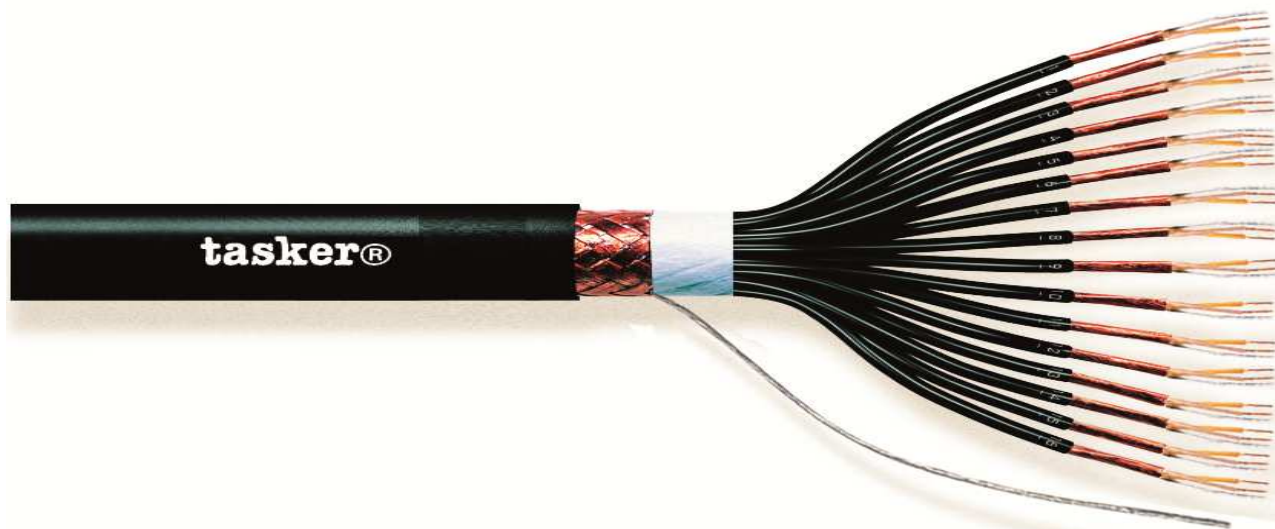

A	B	C	D	E	F	G
---	---	---	---	---	---	---

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture don't represent the real number of conductors  
Multipair Audio Cable (See Audio Catalogue)  
Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black Soft **PVC** Sheath.  
Outer cable Ø: 11,00 (±0,20) mm.
- B:** Total Shielding in O.F.C. red copper Braid covering 85%.  
+ Tinned Copper Drain Wire.
- C:** Total taping in not woven polyester tape.
- D:** Inner sheaths in PVC, Black and numbered. Diam. Ø 3,00 (±0,20) mm.
- E:** Shielding on each single pair in O.F.C. red copper Spiral, covering 100%.
- F:** Core Insulation with solid PE, colored one Transparent and one Yellow.  
Diam. Ø: 1,00 (±0,20) mm.
- G:** O.F.C. red copper formation 28x0,10 mm.  
Nom. Cross section 4x2x0,22 mm<sup>2</sup>.

**MARKING**

C304 4x2x0,22mm<sup>2</sup> Professional Shielded Multipair Cable for Audio Mixer –  
Made in Italy

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	75 pF/mt
<b>Capacity Core/Shield</b>	160 pF/mt
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio
<b>Impiego</b>		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa
<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.16