

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com


Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
RE.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it



Technical Datasheet

tasker® C530 NETBUS Cable - LonWorks™

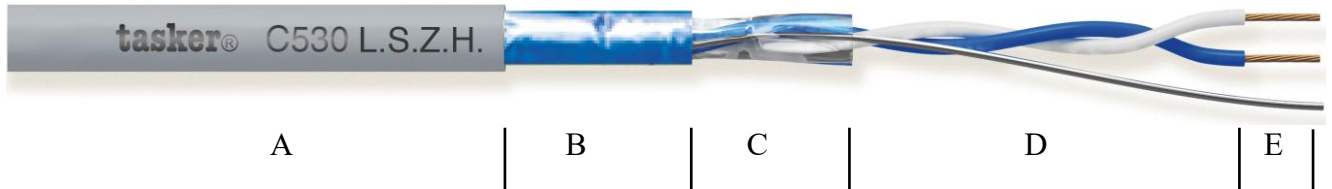

CATEGORY Shielded Cable for NETBUS networks (See Data Network Catalogue)
APPLICATIONS Electronics and data transmission for professional mobile use and stage.

- A:** Grey **L.S.Z.H.** sheath. Flame Retardant and Halogen Free.
Outer Diam. Ø: 5,00 (±0,20) mm.
- B:** Shielding in Aluminum/PET tape, covering 100% + Drain Wire.
- C:** The cores are stranded in a pair with polyester tape and synthetic fillers.
- D:** Core insulated in Foam PE colored one blue and one white.
Diam. Ø 1,65 (±0,20) mm.
- E:** Stiff Wire O.F.C. Red Copper, formation 1x0,64 mm.
Nom. Cross section 1x2x0,33 mm²

MARKING **tasker®** C530 - 2x22 AWG - O.F.C. – Netbus Lonworks Cable - FirestoP®
L.S.Z.H. – Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in PVC polymer, PE, PUR, with or without Metallic Armor.

Cable Properties

Conductor Resistance	57 Ω/Km
Capacity Core/Core	45 pF/m
Impedance	100 Ω
Operating Voltage (not for power)	300 V
Operative Temperature	-30/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. C / 16.04.26
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			