


Technical Datasheet

tasker® C726 PVC S.-F.T.P. Cat. 7 Flex Cable

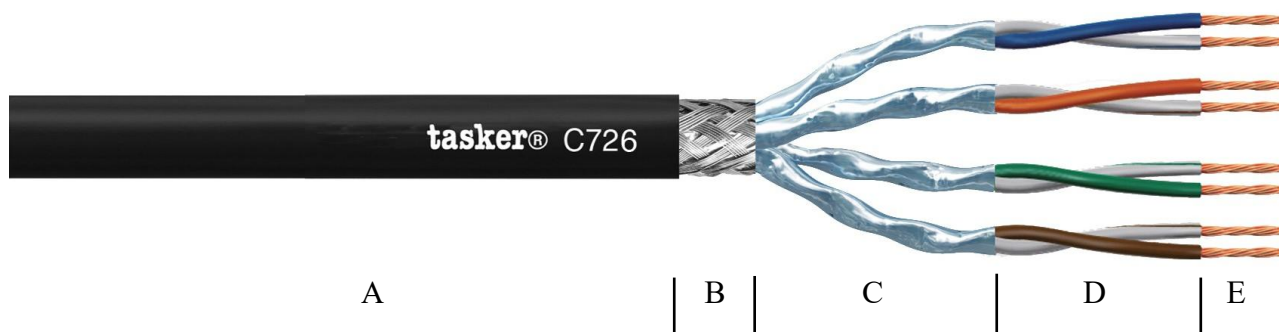

CATEGORY High Frequency Transmission Data (See Audio Catalogue)
APPLICATIONS LAN cabling, high frequency patch cord, Digital A/V over Cat. cables

- A:** Flame Retardant Black PVC Sheath.
Outer Diam. Ø 6,30 (±0,20) mm.
- B:** First shielding with a Braid of O.F.C. tinned copper shield with 65% nom. coverage.
- C:** Second shielding with aluminum/polyester tape, covering 100%, on each single pairs.
- D:** Foam-skin polyethylene – max 1.05mm. RJ45 plug connector compatible. White-blue, White-orange, White-green, White-brown.
- E:** Stranded wires in O.F.C. Red Copper - formation 7x0,16 mm.
Nom. Cross section 4x2x0,14mm².

MARKING tasker® C726 S-F.T.P. 4x2x0,14 mm² CAT.7 EXTRA FLEX ETHERNET
DIGITAL SOUND FIRESTOP® - Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PVC, PUR, with or without Metallic Armor.

Cable Properties

Conductor Resistance	138 Ω/Km
Impedance	100 Ω
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio
Impiego	X	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS3 Compliant
Informazioni	X	Ver. A / 16.04.19