


Technical Datasheet

tasker® C267 – 2x3,00 mm²

Double Density Sheath Flexible Speaker Cable

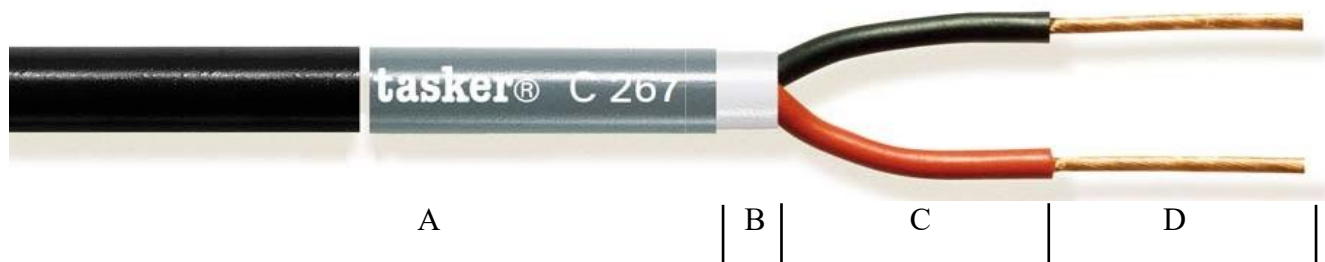

CATEGORY Flexible Speaker Cable (See Audio Catalogue)
APPLICATIONS Professional Loudspeakers and premade cables

- A:** First Soft **PVC** Sheath. Available in different color.
Outer cable Diam. Ø 9,80 (±0,20) mm.
- B:** Second Soft **PVC** Sheath with different density.
- C:** Core Insulation in **PVC**, colored one Red and one Black.
Diam. Ø 3,90 mm (±0,20) mm.
- D:** O.F.C. red copper formation 96x0,20 mm
Nom. Cross section 2x3,00 mm².

MARKING tasker® C267 - 2x3,00 mm² - O.F.C. - Loudspeakers Cable - Made in Italy
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
PRODUCTION with or without Metallic Armor.

Cable Properties

Conductor Resistance	5,70 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			