


Technical Datasheet

tasker® C297 - 6x0,22 + 2x0,50mm² - Alarm Cable

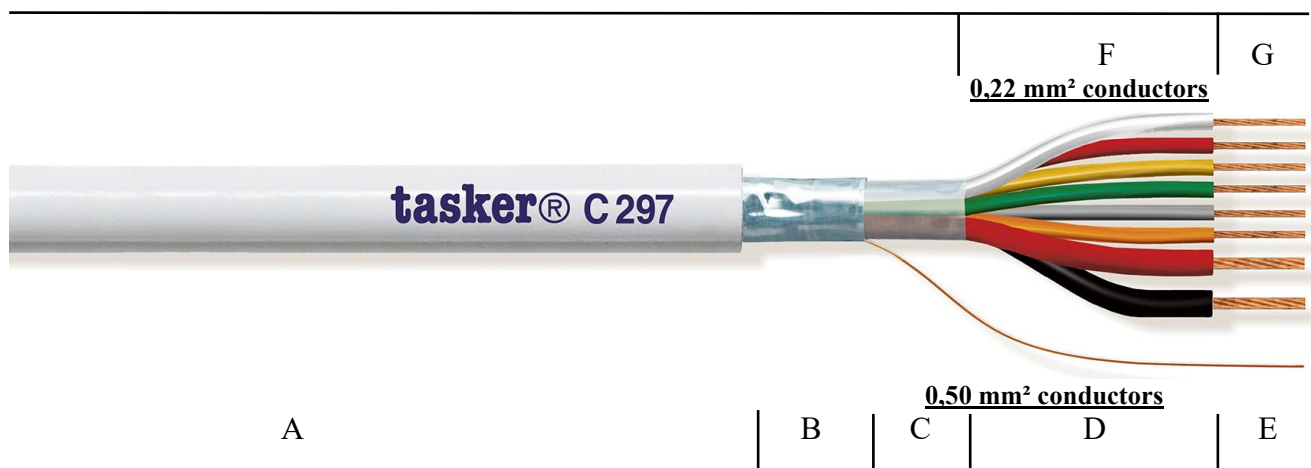

CATEGORY Alarm Cable (See Data Network Catalogue).

APPLICATIONS Alarm Systems and Electronics.

- A:** White **Flame Retardant PVC** sheath. RAL 9003.
Outer cable diam. Ø 5,20 (±0,20) mm.
- B:** Shielding with Aluminum polyester tape covering 100%
+ Drain Wire in O.F.C. red copper.
- C:** The six conductors are stranded together with polyester-based tape.

2x0,50 mm² conductors

- D:** Insulation with PVC. Diam. Ø 1,50 (±0,20) mm. Core colors: Red, Black.
- E:** Stranded formation of 16x0,20 mm in O.F.C. Red Copper.
Nom. Cross section 2x0,50 mm².

6x 0,22 mm² conductors

- F:** Insulation with PVC. Diam. Ø 1,00 (±0,20) mm.
Core colors: White, Red, Yellow, Green, Grey and Orange.
- G:** Stranded formation of 7x0,20 mm in O.F.C. Red Copper
Nom. Cross section 6x0,22 mm².

MARKING CUSTOM PRODUCTION

tasker® Shielded Alarm Systems cable - FirestoP® - Made in Italy
This product may be custom produced also in **L.S.Z.H., PE, PUR,**
with or without Metallic Armor.

MILAN S.r.l. a socio Unico
Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Cable Properties

Conductor 0,22 mm ² Resistance	79,15 Ω/Km
Conductor 0,50 mm ² Resistance	38,00 Ω/Km
Max Rated Voltage	49 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 26.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			