

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® TSK 1160 U.S.B. 2.0

FirestoP® UL AWM STYLE 2725 Cable

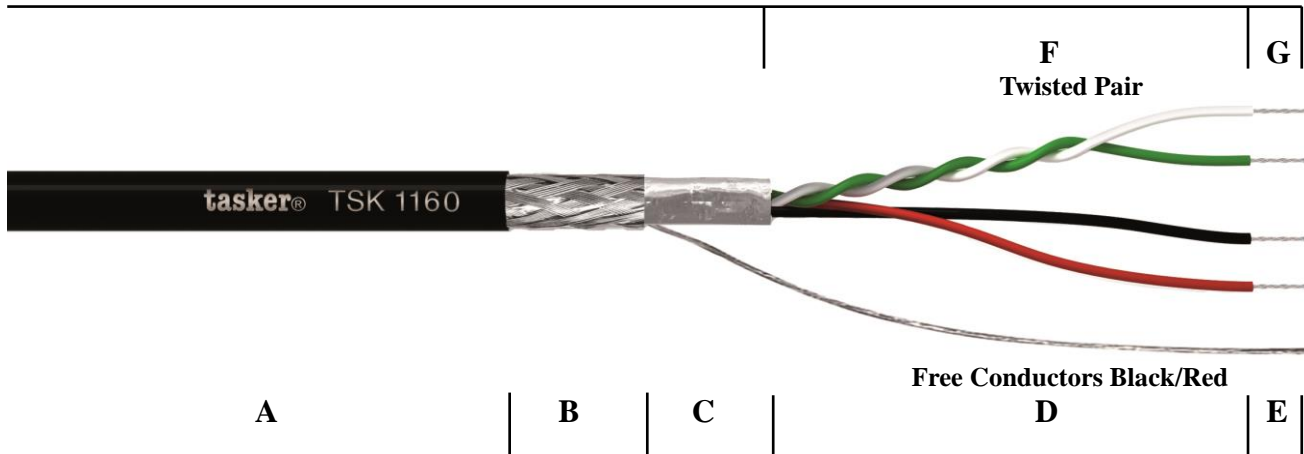

CATEGORY USB Cable (See Audio Catalogue)
APPLICATIONS Data transmission and premade cables on USB2.0

- A:** Black **Flame Retardant PVC** sheath.
Outer Diam. Ø 5,20 (±0,20) mm.
- B:** First Shield in O.F.C. tinned copper Braid covering 90%
+ Drain Wire in tinned copper (7x0,16 mm).
- C:** Second Shield in Aluminum/ Mylar tape covering 125%

2x0,22 mm² Conductors:

- D:** The two single conductors are isolated with PVC sheath and colored one black and red. Diam. Ø 1,00 (±0,20) mm.
- E:** Stranded O.F.C. tinned copper Formation 7x0,20 mm.
Nom. Cross section 2x0,22 mm².

1x2x0,14 mm² Stranded Pair:

- F:** The twisted pair is isolated with HDPE sheath colored one White and one Green – Diam. Ø 1,00 (±0,20) mm.
- G:** Stranded O.F.C. tinned copper Formation 7x0,16 mm.
Nom. Cross section 1x2x0,14 mm².



MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

MARKING

tasker® TSK1160 26 AWG – UL – AWM Style 2725 O.F.C. U.S.B. 2.0 Extra Flex Cable 80°C – 30V FirestoP® VW-1

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Standard	USB 2.0
UL Style	2725
Max Rated Voltage	30 V
Impedance of the pair	90±13,5 Ω
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver.B / 17.06.23
		Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			