


Technical Datasheet

tasker® C125 – 3x0,12 + 2x0,12 mm²

Special Video/Audio Cable

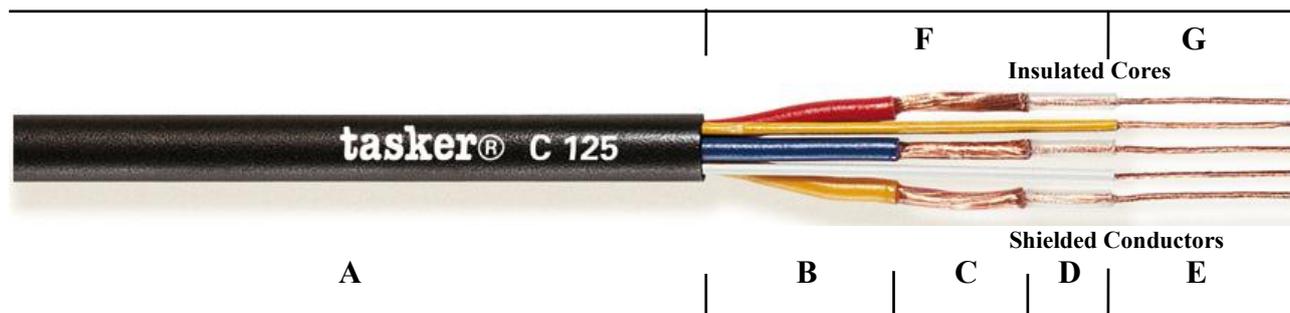

CATEGORY Special Video/Audio Cable (See Video Catalogue)
APPLICATIONS SCART, S-VHS and other Audio/video installations.

A: Black PVC Sheath. Outer Diam. Ø 6,00 (±0,20) mm.

3 x Shielded Conductors:

- B:** Soft PVC Sheath. Colored Red, Blue, Yellow.
Diam. Ø 2,10 (±0,20) mm.
- C:** O.F.C. red copper spiral shielding, covering 100%.
- D:** Dielectric insulation in transparent PE. Diam. 1,00 (±0,20) mm.
- E:** O.F.C. red copper Stranded formation 16x0,10 mm.
Nom. Cross Section 3x0,12 mm². (26 AWG)

2x Insulated Cores:

- F:** PVC Sheath. Yellow and White. Diam. Ø 1,00 (±0,20) mm.
- G:** O.F.C. red copper Stranded formation 16x0,10 mm.
Nom. Cross Section 2x0,12 mm². (26 AWG)

MARKING tasker® C125 3x0,12 + 2x0,12 SPECIAL VIDEO-AUDIO CABLE
CUSTOM PRODUCTION This product may be custom produced also in LSZH, PE, PUR, with or without Metallic Armor.

General Properties

Conductors Resistance	140 Ω/Km
Capacity Core/Shield	270 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			