

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet



tasker® C220 - 2x0,25 mm² - Shielded Flat Audio Cable

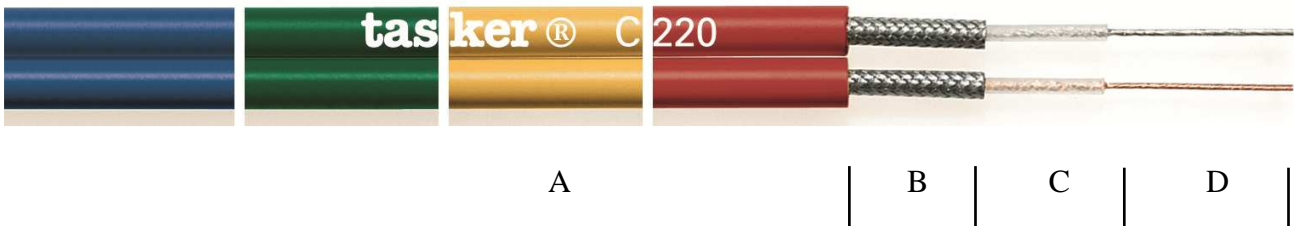

CATEGORY Shielded Flat Audio Cables (See Audio Catalogue)
APPLICATIONS Professional Sound Reproduction and Audio Premade cabling

- A:** Soft **PVC** Sheath – Available in different colors.
Outer cable Dimensions: 5,00x10,30 (±0,10) mm.
- B:** The single conductors are shielded with O.F.C. tinned copper braid, covering 100%.
- C:** Core Insulation in transparent compact PE. Diam. Ø 1,60 (±0,10) mm.
- D:** Stranded formation 8x0,20 mm. One conductor made in O.F.C. red copper and one in O.F.C. tinned copper. Nom. Cross section 2x0,25 mm².

MARKING tasker® C220 2x0,25 - O.F.C. Professional Shielded Flat Cable - Made in Italy
CUSTOM PRODUCTION This product may be custom produced also in **LSZH**. polymer, **PE** or **PUR**.

Cable Properties

Conductor Resistance	75 Ω/Km
Capacity Core/Core	42 pF/m
Capacity Core/Shield	130 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			