


Technical Datasheet

tasker® TSK604 CPR Cca – 8x4,00 mm² Fix Installation Speaker Cable

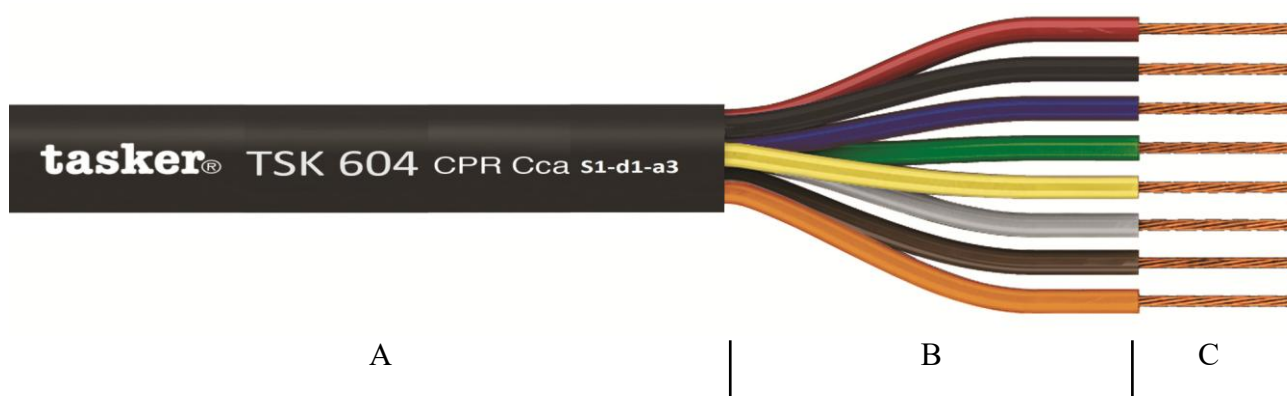

CATEGORY Fix Installation Speaker Cable (see news brochure)
APPLICATIONS Professional Loudspeakers

- A:** Black **L.S.Z.H.** polymer grade M1. Flame Retardant and halogen Free.
Outer cable Ø 16,50 (±0,20) mm.
- B:** Core Insulation in **L.S.Z.H.**, colored one Red, Black, White, Blue, Green,
Yellow, Brown, Orange.
Diam. Ø 4,00 (±0,20) mm.
- C:** O.F.C. red copper formation 56x0,30 mm.
Nom. Cross section 8x4,00 mm².

MARKING **tasker®** TSK604 CPR Cca – 8x4,00 mm² – Loudspeaker Cable - 0987-CPR-721
CPR Cca – s1-d1-a3 – FirestoP® - Halogen Free - Made in Italy

NOTE The cables are suitable for application in the same conduit with circuits of electrical
systems with rated voltage up to 400V to earth, typically 230/400V power systems.

Cable Properties

Conductor Resistance	4,95 Ω/Km
Max Rated Voltage	100 V
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Flexible Limited	Flessibilità limitata	Informazioni	X	Ver. B / 22.01.24
	X	Outdoor	Esterno			Dynamic (Drag Chain)	Mobile in Catena			
		Outdoor Direct Burial	Esterno Interrato			Dynamic (Torsion)	Mobile in Torsione			