

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com


Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Technical Datasheet

tasker® C283 Soft – 2x0,22 + 3x1,50 mm²

Special DMX 110 Ohm Cable

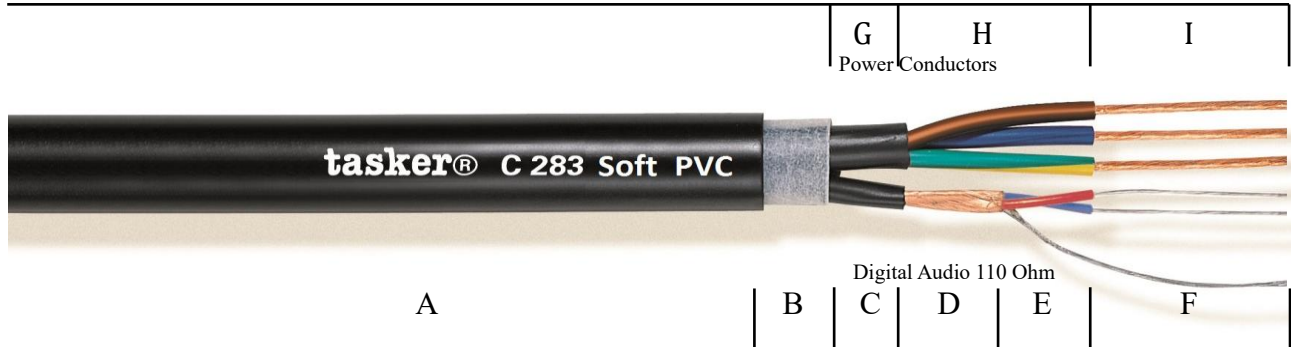

CATEGORY Special production DMX and Power Cable
APPLICATIONS Special cable for professional mobile use and stage.

- A:** Black Soft PVC. Outer cable Diam. Ø 16,00 (±0,20) mm.
- B:** The inner sheaths are stranded with filler between conductors and wrapped with not woven polyester tape.

Digital Audio 110 Ohm Pair:

- C:** Black PVC. Diam. Ø 4,00 (±0,20) mm.
- D:** Shielding O.F.C. red copper Spiral covering 100% + O.F.C. tinned copper Drain Wire.
- E:** Core Insulation with foam PE, colored one Red and one Blue. Diam. Ø 1,50 (±0,20) mm.
- F:** O.F.C. tinned copper - formation 28x0,10 mm. Nom. Cross section 2x0,22 mm².

Three Power Conductors:

- G:** Black Soft **Flame Retardant PVC**. Diam. Ø: 7,20 (±0,20) mm.
- H:** Core Insulation with PVC colored: Brown, Blue and Yellow/Green. Diam. Ø 2,80 (±0,20) mm.
- I:** O.F.C. red copper – formation 48x0,20 mm. Nom. Cross section 3x1,50 mm².

MARKING **tasker®** C283 Soft PVC - 2x0,22 + 3x1,50 mm² - Extra Flex Digital DMX Cable – made in Italy

MILAN S.r.l. a socio Unico

Head Office - Export Department
Viale Europa, 74
20047 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158
www.taskercables.com

Ufficio Commerciale e Distribuzione
Viale Europa, 72 Strada F12
20047 Cusago (MI) Italy
Tel. +39 02 9039.0037 - 0059
www.tasker.it

Capitale Sociale € 100.000,00 i.v.
Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it

Cable Properties

Digital Audio Cables Resistance	89,00 Ω/Km
Power Conductor Resistance	13,30 Ω/Km
Impedance	110 Ω
Capacity Core/Core	50 pF/m
Capacity Core/Shield	95 pF/m
Min. Bending Radius Fix	10xO.D.
Min. Bending Radius Mobile	15xO.D.
Operating Voltage	300 V (not for power)
Operative Temperature	-20/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 02.12.25
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			