

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet ✓ RoHS₃

tasker® C280 – 2x0,22 mm² Balanced Microphone Cable



A	B	C	D
---	---	---	---


CATEGORY Balanced Microphone Cable (See Audio Catalogue)
APPLICATIONS Premade Audio Cables and Microphones.

- A:** Soft Blue PVC Sheath. Outer Diam. Ø 5,00 (±0,20) mm.
- B:** Shielding in O.F.C. red copper Spiral covering 100% + O.F.C. Tinned copper Drain Wire.
- C:** The cores are stranded in a pair with waste filler between conductors and wrapped with not woven polyester based tape. Core Insulation with a compact XLPE, colored one Red and one Transparent. Diam. Ø 1,20 (±0,20) mm.
- D:** O.F.C. red copper formation 28x0,10 mm. Nom. Cross section 2x0,22 mm².

MARKING tasker® C280 2x0,22 PROFESSIONAL NOISELESS MICROPHONE CABLE FOR WIRING

CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PUR, or Metallic Armored.

Attenuation Test – Start 9 KHz – Stop 25 KHz

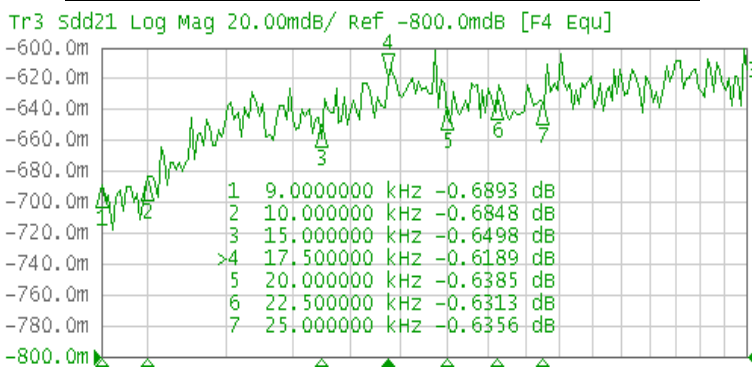

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/m
Capacity Core/Shield	160 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS2 Compliant
Impiego	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	Posa	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			